



API

Flanged Safety Relief Valves
Series 526


CATALOG

LESER

www.cv3000.com

Valve finder

How to find the right product group

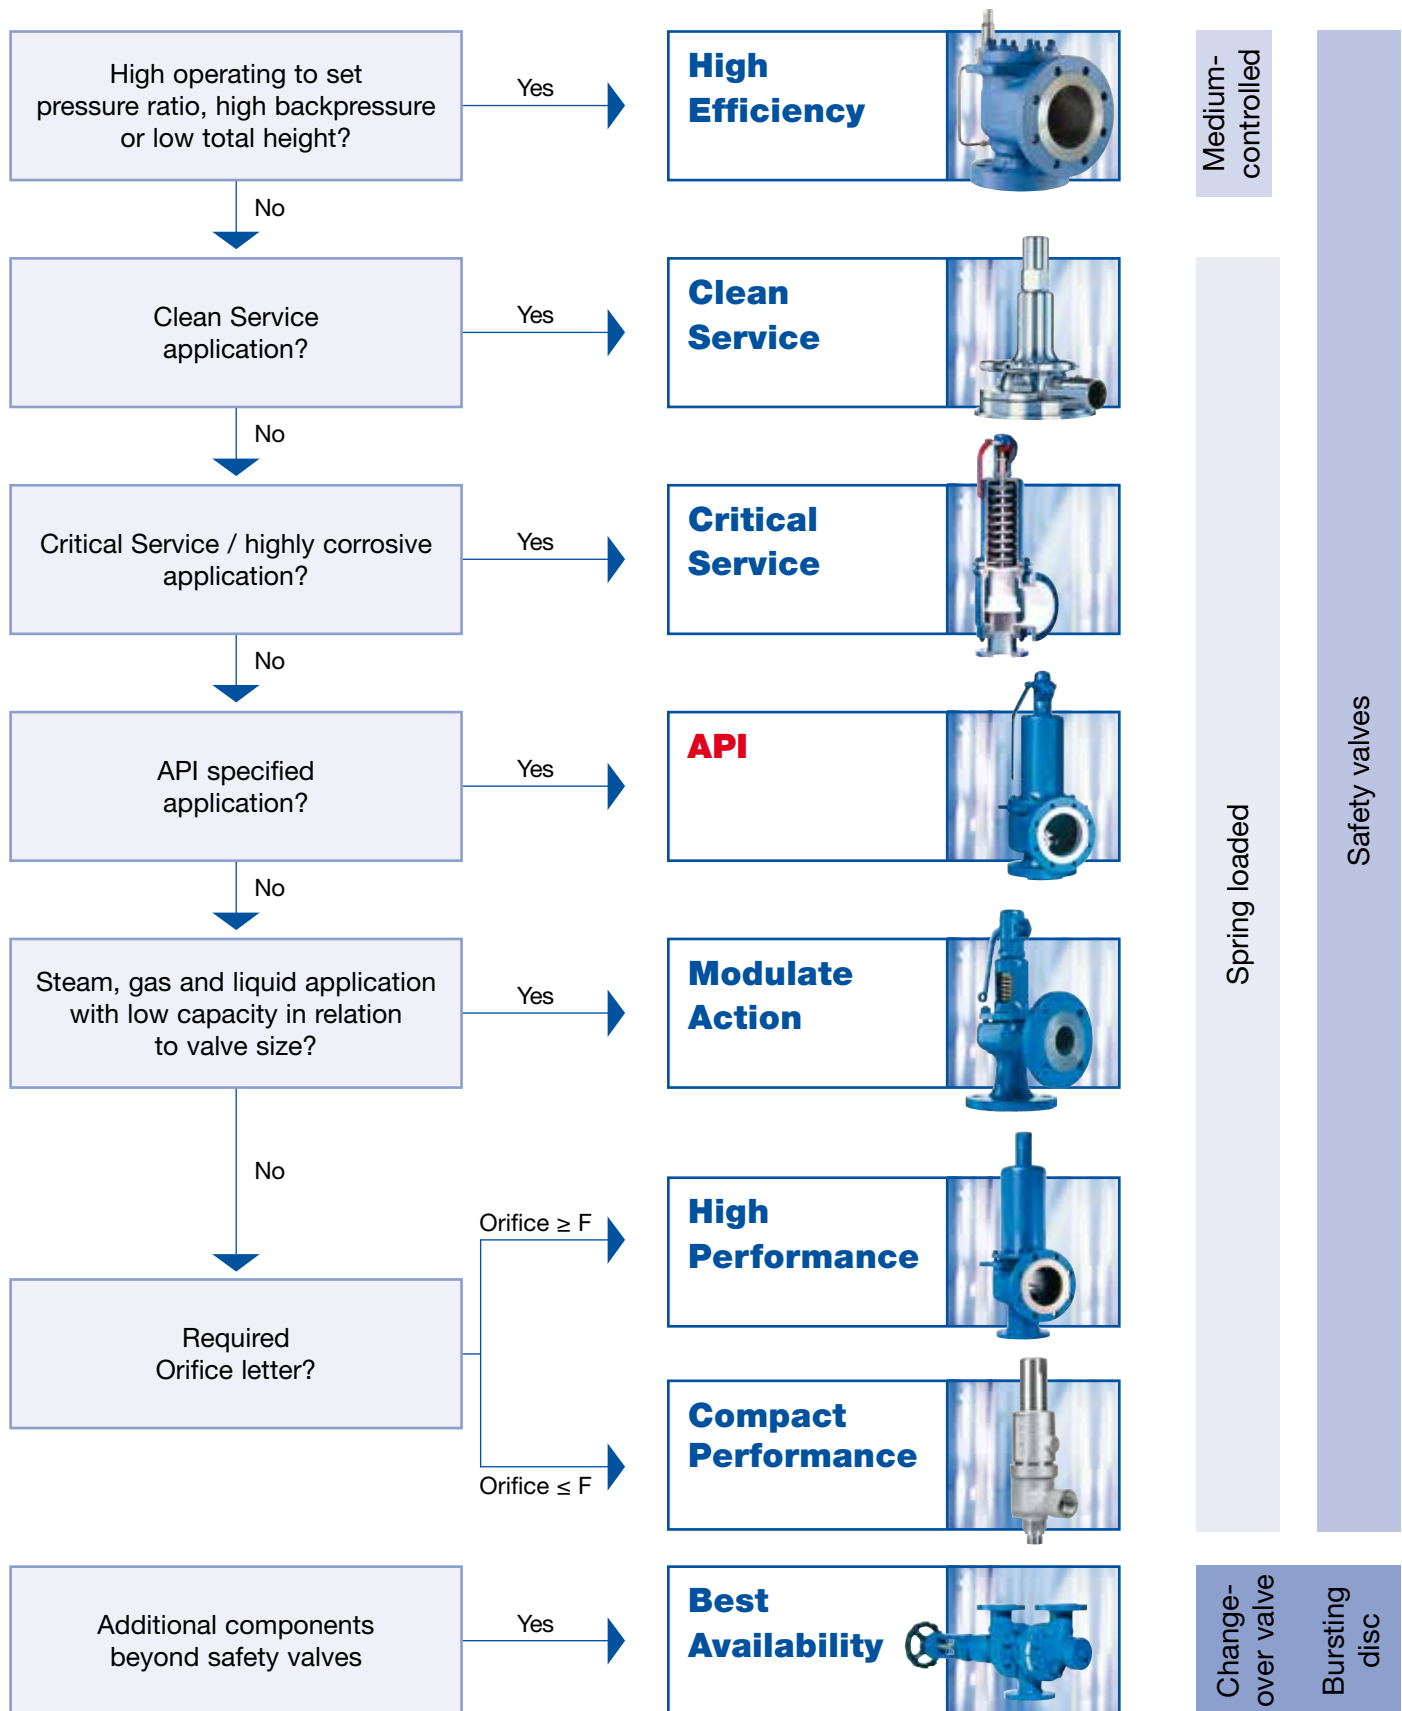


Contents


	Page
General	2
Valve finder	2
General Information	4
Type 526	5
Materials	
• Conventional design	6
• Balanced bellows design	8
Article numbers	
• Overview	12
Dimensions	
• Metric units	16
• US units	18
Weights	
• Metric units	16
• US units	17
Orifice D – T	
• Pressure temperature ratings [Metric + US units]	18
Available options	46
Flange drillings	48
Outlet flange rating class 300	50
Flange facings	53
LESER Original Spare Parts Kits	54
Approvals	55




Cap H2
Closed bonnet
Conventional design

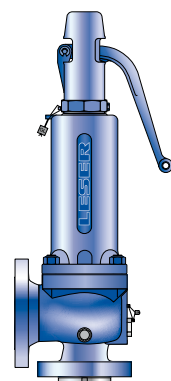


Plain lever H3
Closed bonnet
Conventional design



Packed lever H4
Closed bonnet
Conventional design

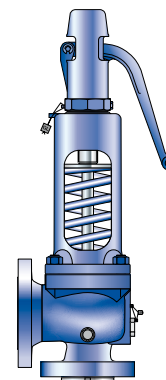

Plain lever H3
Open bonnet
Conventional design



Cap H2
Closed bonnet
Balanced bellows design

General Information

The API product group represents

- ✓ Full range of spring loaded safety valves acc. to API 526
- ✓ State-of-the-art design from the safety valve specialist
- ✓ Competitive solutions for the API market

API safety valves from LESER

- Are designed to meet all applications which require API.
- Open rapidly with an overpressure of max. 10 % to the full design lift.
- Have a maximum blowdown of 7 % for steam/gas service and 20 % for liquid service.
- Are developed in a close cooperation with plant engineers and service specialists.
- Serve for protection of processes and equipment.
- Are approved by all important approval organisations worldwide which ensures the worldwide applicability e.g.:
 - European Community: CE-marking acc. to Pressure Equipment Directive (PED) 97 / 23 / EC and EN ISO 4126-1
 - USA: UV-stamp acc. to ASME Section VIII Division 1, National Board certified capacities
 - Germany: VdTÜV approval acc. to PED, EN ISO 4126-1, TÜV SV 100 and AD 2000-Merkblatt A2
 - Canada: Canadian Registration Number acc. to the requirements of particular provinces
 - China: AQSIQ based on the approval acc. to ASME Section VIII Division 1 and AD 2000-Merkblatt A2
 - Eurasian Custom Union: Approval acc. to Eurasian Custom Union (EAC - Eurasian Conformity)

Furthermore, all LESER API safety valves are designed, marked, produced and approved acc. to the requirements of the following regulations (directives, codes, rules and standards).

EN ISO 4126-7, EN 12266-1/-2, EN 1092 Part I and II flanging ASME PTC 25, ASME-Code Sec. II, ASME B 16.34 and ASME B16.5- flanging, API Std. 527, API RP 576, AD 2000-Merkblatt A4, AD 2000-Merkblatt HP0

Applications

LESER – API safety valves offer ultimate protection against overpressure in all applications for steam, gases and liquids.

LESER's API Series safety valves present the simple safe solution for heavy duty applications, such as crude oil extraction, transportation and processing in

- Refineries
- Chemical industry
- Petrochemical industry
- Oil and gas – Onshore and Offshore
- Vessels and piping systems
- Blow-down systems
- Storage tank farms

General design features

LESER's API Series covers a large variety of types, materials and options to fit any application:

- Design fully in accordance with API 526 for easy interchangeability
- Complete API 526 range: valve sizes 1" through 8", orifice D through T
- Materials: WCB, WCC, CF8M, WC6, LCB, LCC, and a wide range of special materials to fulfill the requirements of critical applications
- Special B³ design for high back pressure applications and material requirements far beyond API Standard
- Fool proof design with fewer parts for built-in safety
- Integral cast support brackets for easy handling and safe installation
- Open or closed bonnet, packed or plain lifting lever or gastight cap
- Flanged connections according ASME and DIN guarantee a worldwide applicability
- One design and spring (single trim) for steam, gas and liquid applications reduces the number of spare parts and ensures low cost maintenance management.
- One-piece spindle reduces friction which leads to high operation accuracy
- Self-draining body design, avoids residues and reduces corrosion
- Horizontal installation

Options

- Special connections specified by the customer for optimised adaptation to the plant.
- Stellite or hardened metal sealing for longer product life
- Soft seat solutions for superior tightness
- Balanced bellows for back pressure compensation
- Heating jackets for applications with high viscosity fluids
- Any and every part can be produced in special material exactly to meet customer specification requirements



Type 526 Flanged Safety Relief Valves – spring loaded




Type 526
Packed lever H4
Closed bonnet
Conventional design

Contents	Page
Materials	
• Conventional design	6
• Balanced bellows design	8
Article numbers	
• Overview	10
Dimensions	
• Metric units	12
• US units	14
Weights	
• Metric units	16
• US units	17
Orifice D – T	
• Pressure temperature ratings [Metric units + US units]	18
Available options	46
Flange drillings	48
Outlet flange rating class 300	50
Flange facings	53
LESER Original Spare Parts Kits	54
Approvals	55

Type 526
Conventional design

Type 526

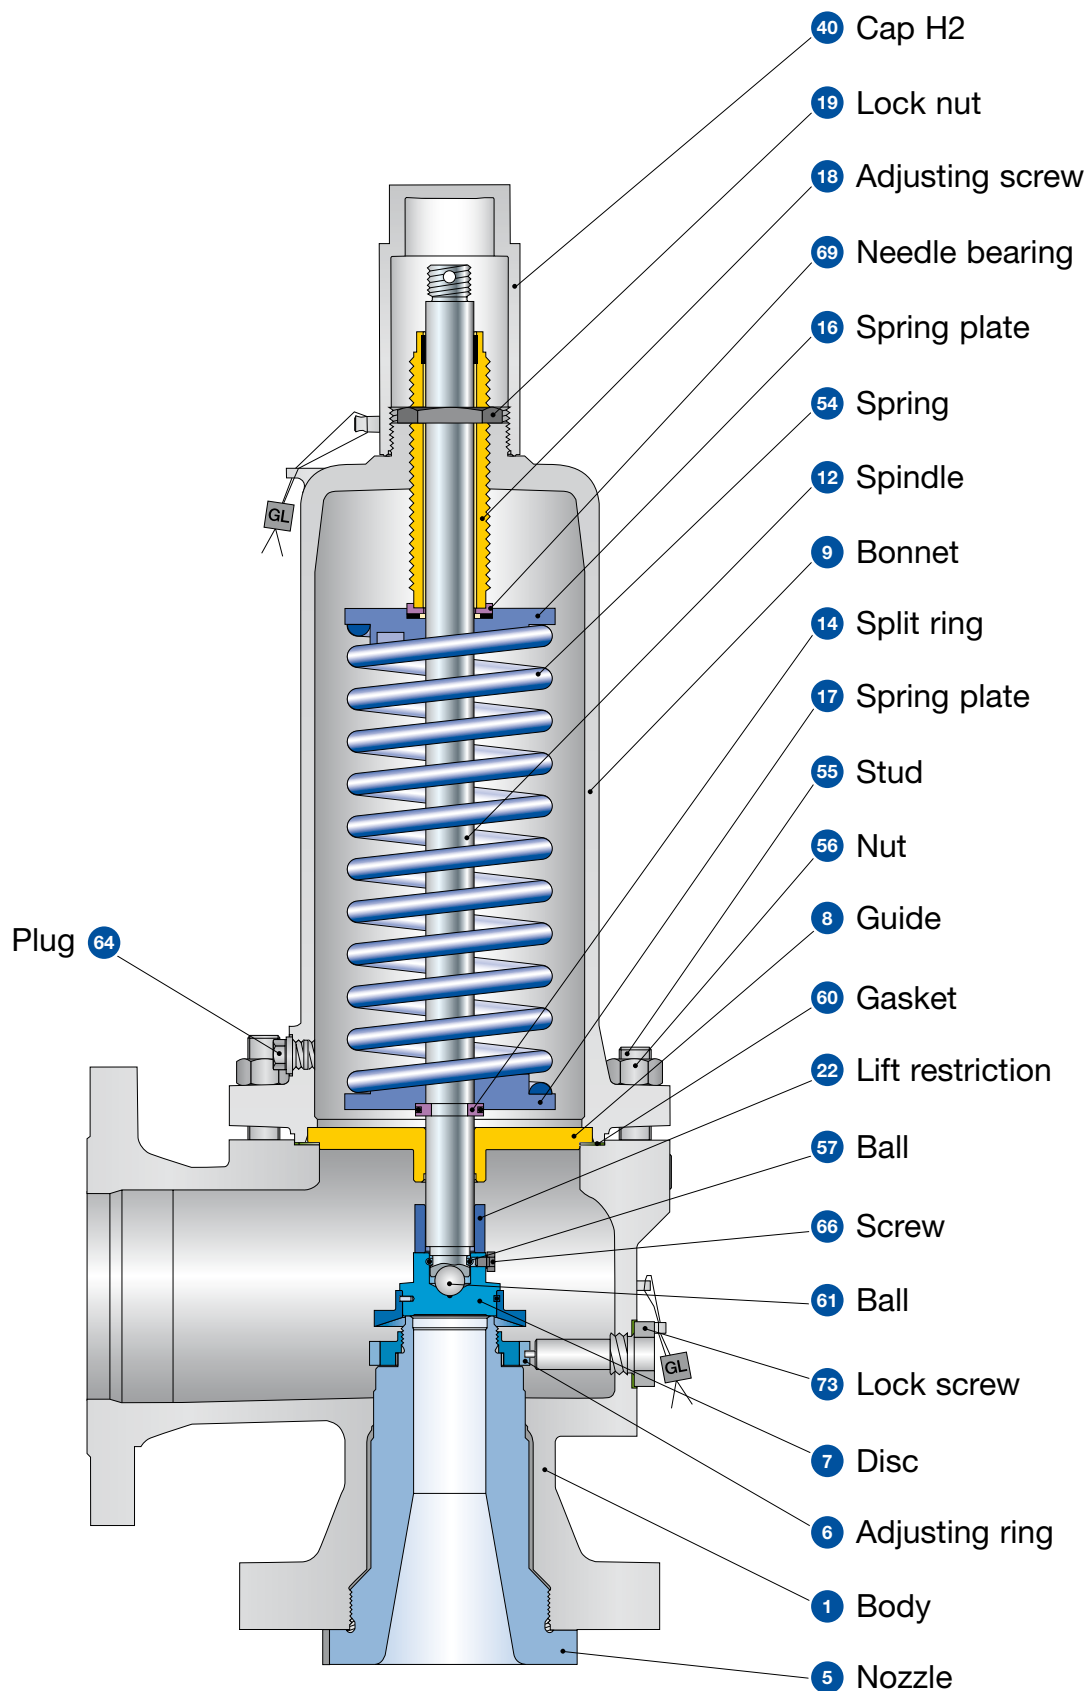

Type 526

Conventional design

Materials

Item	Component	Standard Service Type 5262 Trim: Standard	Corrosive Service Type 5264 Trim: Standard	Type 5267 Trim: Standard	Type 5263 Trim: Standard
1	Body	1.0619 SA 216 WCB	1.4408 SA 351 CF8M	1.7357 SA 217 WC6	SA 352 LCB
5	Nozzle ¹⁾	1.4408 CF8M	1.4408 CF8M	1.4408 stellited CF8M stellited	1.4408 CF8M
6	Adjusting ring	1.4408 CF8M	1.4408 CF8M	1.4408 CF8M	1.4408 CF8M
7	Disc	1.4122 Hardened stainless steel	1.4404 stellited 316L stellited	1.4122 Hardened stainless steel	1.4122 Hardened stainless steel
8	Guide with bushing	1.0501 Steel 1.4104 tenifer Chrome steel tenifer	1.4404 316L - -	1.4404 316L - -	1.0501 Steel 1.4104 tenifer Chrome steel tenifer
9	Bonnet	1.0619 SA 216 WCB 1.0305 ⁴⁾ Steel	1.4408 ²⁾ SA 351 CF8M 1.4571 / 1.4404 ³⁾ SA 479 316Ti / 316L	1.7357 SA 217 WC6 1.0305 ⁴⁾ Steel	SA 352 LCB SA 352 LCB 1.0305 ⁴⁾ Steel
12	Spindle	1.4021 420	1.4404 316L	1.4021 420	1.4021 420
14	Split ring	1.4104 Chrome steel	1.4404 316L	1.4104 Chrome steel	1.4104 Chrome steel
16 / 17	Spring plate	1.0718 ³⁾ Steel	1.4404 316L	1.0718 ⁵⁾ Steel	1.0718 ⁵⁾ Steel
18	Adjusting screw with bushing	1.4104 Chrome steel PTFE 15% glass PTFE 15% glass	1.4404 tenifer 316L tenifer PTFE 15% glass PTFE 15% glass	1.4104 Chrome steel PTFE 15% glass PTFE 15% glass	1.4104 Chrome steel PTFE 15% glass PTFE 15% glass
19	Lock nut	1.0718 Steel	1.4404 316L	1.0718 Steel	1.0718 Steel
22	Lift restriction	1.4404 316L	1.4404 316L	1.4404 316L	1.4404 316L
40	Cap H2	1.0460 / 0.7040 SA 105 / Gr. 60-40-18	1.4404 316L	1.0460 / 0.7040 SA 105 / Gr. 60-40-18	1.0460 / 0.7040 SA 105 / Gr. 60-40-18
54	Spring	1.7102, 1.8159 High temp. alloy steel	1.4310 Stainless steel	1.7102, 1.8159 High temp. alloy steel	1.7102, 1.8159 High temp. alloy steel
55	Stud	1.4401 B8M	1.4401 B8M	1.4401 B8M	1.4401 B8M
56	Nut	1.4401 8M	1.4401 8M	1.4401 8M	1.4401 8M
57	Ball	1.4401 316	1.4401 316	1.4401 316	1.4401 316
60	Gasket	Graphite / 1.4401 Graphite / 316	Graphite / 1.4401 Graphite / 316	Graphite / 1.4401 Graphite / 316	Graphite / 1.4401 Graphite / 316
61	Ball	1.3541 Hardened stainless steel	1.4401 316	1.3541 Hardened stainless steel	1.3541 Hardened stainless steel
64	Plug	Steel Steel	1.4401 B8M	Steel Steel	Steel Steel
66	Screw	1.4401 B8M	1.4401 B8M	1.4401 B8M	1.4401 B8M
69	Needle bearing	1.4404 316L	1.4404 316 L	1.4404 316L	1.4404 316L
73	Lock screw	1.4404 316L	1.4404 316L	1.4404 316L	1.4404 316L

¹⁾ Stellited sealing surfaces please refer to page 102 Extended Catalog. LESER reserves also to use the nozzle material 1.4404 / 316L. ²⁾ Valve sizes up to 2" ³⁾ Valve sizes ≥ 3"
⁴⁾ Valve size 6 R 10, 8 T 10 and 6 Q 8 in high pressure design (Option code Z90). ⁵⁾ For valve sizes 6 Q 8, 6 R 10 and 8 T 10 in high pressure design: 1.4122 / chrome steel.

Please notice:


- Modifications reserved by LESER.
- If several materials are specified LESER defines the material.
- LESER can upgrade materials without notice.
- Every part can be replaced by other material acc. to customer specification.

Special materials:

See API Alloy Concept page 80, Extended Catalog.

Type 526
Balanced bellows design

Type 526

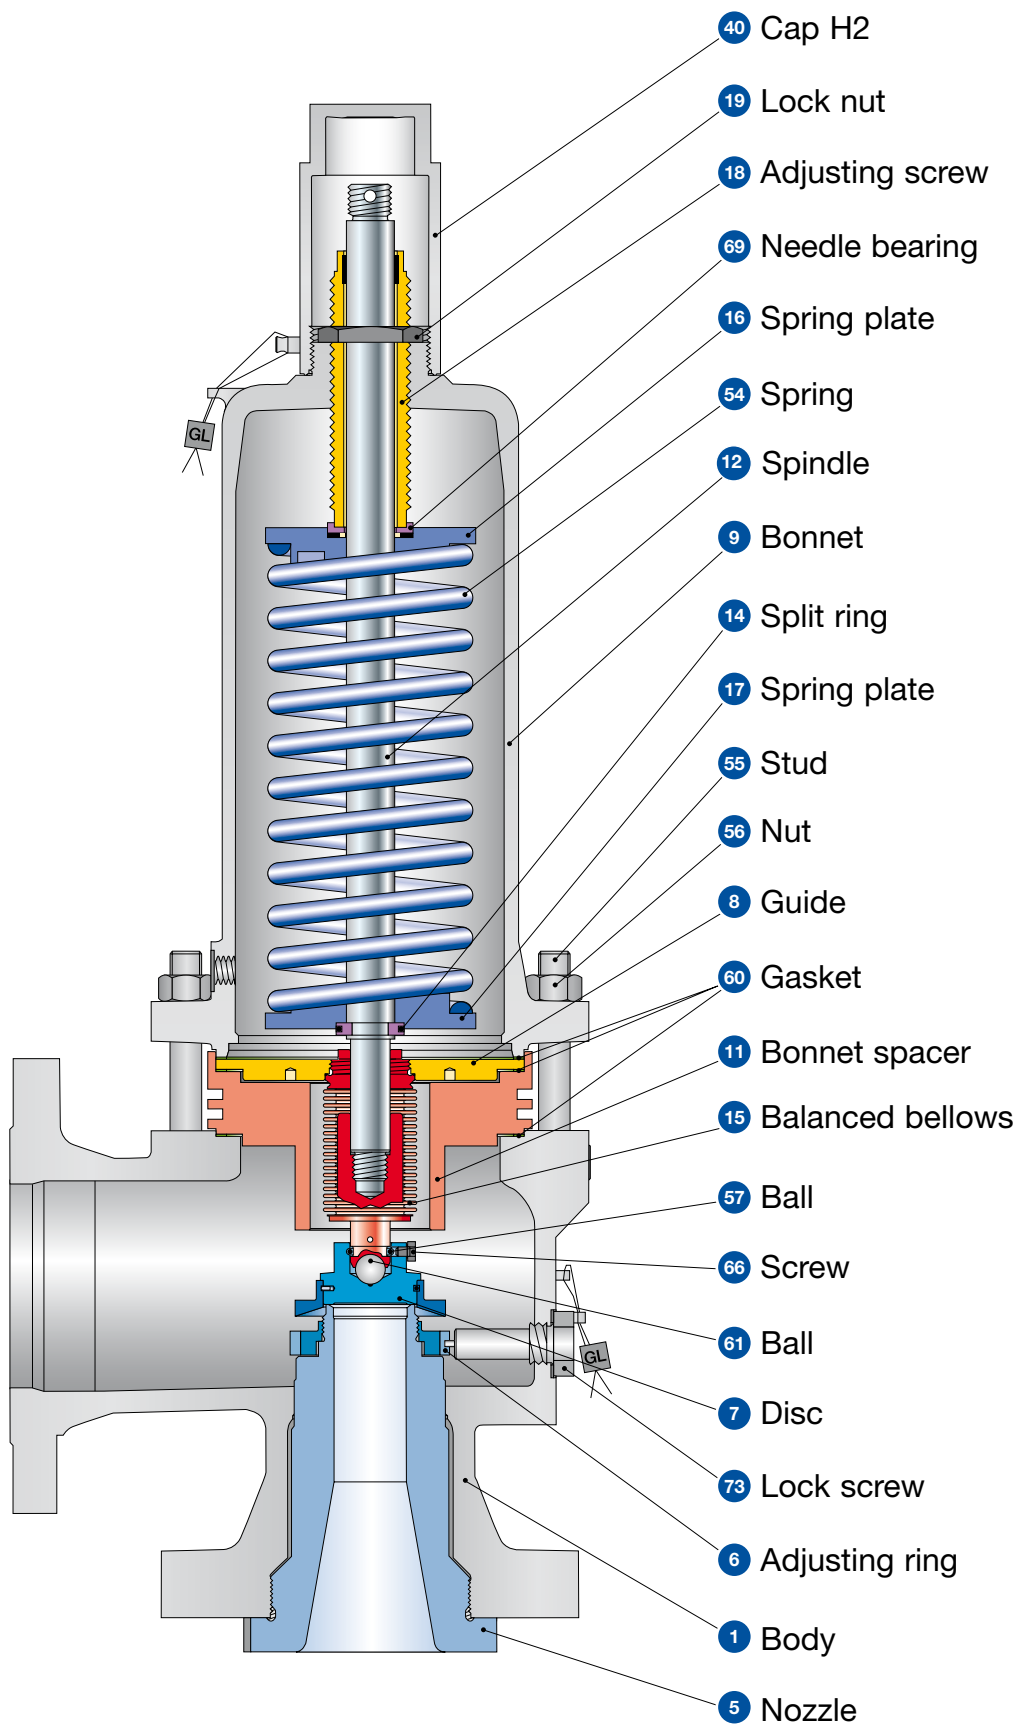

Type 526

Balanced bellows design

Materials

Item	Component	Standard Service Type 5262 Trim: Standard		Corrosive Service Type 5264 Trim: Standard		Type 5267 Trim: Standard		Type 5263 Trim: Standard	
1	Body	1.0619 SA 216 WCB		1.4408 SA 351 CF8M		1.7357 SA 217 WC6		SA 352 LCB	
5	Nozzle ¹⁾	1.4408 CF8M		1.4408 CF8M		1.4408 stellited CF8M stellited		1.4408 CF8M	
6	Adjusting ring	1.4408 CF8M		1.4408 CF8M		1.4408 CF8M		1.4408 CF8M	
7	Disc	1.4122 Hardened stainless steel		1.4404 stellited 316L stellited		1.4122 Hardened stainless steel		1.4122 Hardened stainless steel	
8	Guide	1.4404 316 L		1.4404 316L		1.4404 316L		1.4404 316L	
9	Bonnet	1.0619 SA 216 WCB		1.4408 ²⁾ SA 351 CF8M		1.7357 SA 217 WC6		SA 352 LCB	
		1.0305 ⁴⁾ Steel		1.4571 / 1.4404 ³⁾ SA 479 316Ti / 316L		1.0305 ⁴⁾ Steel		1.0305 ⁴⁾ Steel	
11	Bonnet spacer ⁵⁾	1.0460 SA 105		1.4404 ⁷⁾ SA 479 316L		1.4404 ⁷⁾ SA 479 316L		1.4404 ⁷⁾ SA 479 316L	
12	Spindle	1.4021 420		1.4404 316L		1.4021 420		1.4021 420	
14	Split ring	1.4104 Chrome steel		1.4404 316L		1.4104 Chrome steel		1.4104 Chrome steel	
15	Bellows	End pieces	2.4856 Inconel 625	1.4404 316L	2.4856 Inconel 625	1.4404 316L	2.4856 Inconel 625	1.4404 316L	2.4856 Inconel 625
16 / 17	Spring plate	1.0718 ⁴⁾ Steel		1.4404 316L		1.0718 ⁶⁾ Steel		1.0718 ⁶⁾ Steel	
18	Adjusting screw with bushing	1.4104 Chrome steel		1.4404 tenifer 316L tenifer		1.4104 Chrome steel		1.4104 Chrome steel	
		PTFE 15% glass		PTFE 15% glass		PTFE 15% glass		PTFE 15% glass	
		PTFE 15% glass		PTFE 15% glass		PTFE 15% glass		PTFE 15% glass	
19	Lock nut	1.0718 Steel		1.4404 316L		1.0718 Steel		1.0718 Steel	
40	Cap H2	1.0460 / 0.7040 SA 105 / Gr. 60-40-18		1.4404 316L		1.0460 / 0.7040 SA 105 / Gr. 60-40-18		1.0460 / 0.7040 SA 105 / Gr. 60-40-18	
54	Spring	1.7102, 1.8159 High temp. alloy steel		1.4310 Stainless steel		1.7102, 1.8159 High temp. alloy steel		1.7102, 1.8159 High temp. alloy steel	
55	Stud	1.4401 B8M		1.4401 B8M		1.7709 B16		1.4401 B8M	
56	Nut	1.4401 8M		1.4401 8M		1.7258 7M		1.4401 8M	
57	Ball	1.4401 316		1.4401 316		1.4401 316		1.4401 316	
60	Gasket	Graphite / 1.4401 Graphite / 316		Graphite / 1.4401 Graphite / 316		Graphite / 1.4401 Graphite / 316		Graphite / 1.4401 Graphite / 316	
61	Ball	1.3541 Hardened stainless steel		1.4401 316		1.3541 Hardened stainless steel		1.3541 Hardened stainless steel	
66	Screw	1.4401 B8M		1.4401 B8M		1.4401 B8M		1.4401 B8M	
69	Needle bearing	1.4404 316L		1.4404 316L		1.4404 316L		1.4404 316L	
73	Lock screw	1.4404 316L		1.4404 316L		1.4404 316L		1.4404 316L	

¹⁾ Stellited sealing surfaces please refer to page 102 Extended Catalog. LESER reserves also to use the nozzle material 1.4404 / 316L. ²⁾ Valve sizes up to 2" ³⁾ Valve sizes ≥ 3"

⁴⁾ Valve size 6 R 10, 8 T 10 and 6 Q 8 in high pressure design (Option code Z90). ⁵⁾ Valve size 1½ D 3, 1½ E 3, 1½ F 3, 6 R 10 and 8 T 10 without bonnet spacer.

⁶⁾ For valve sizes 6 Q 8, 6 R 10 and 8 T 10 in high pressure design: 1.4122 / chrome steel. ⁷⁾ LESER reserves also to use material 1.4408/CF8M.

Please notice:

- Modifications reserved by LESER.
- If several materials are specified LESER defines the material.
- LESER can upgrade materials without notice.
- Every part can be replaced by other material acc. to customer specification.

Special materials:

See API Alloy Concept page 80, Extended Catalog.

Type 526

Article numbers

Overview

Material	WCB	CF8M	WC6	LCB	WCB	CF8M	WC6	LCB	WCB	CF8M	WC6	LCB
	1.0619	1.4408	1.7357		1.0619	1.4408	1.7357		1.0619	1.4408	1.7357	
Flange class	150 x 150				300L x 150				300 x 150			
Valve size	1 D 2				1 D 2				1 D 2			
D	5262. 001 [°]	5264. 010 [°]	–	5263. 500 [°]	Use 1 D 2 300 x 150				5262. 002 [°]	5264. 011 [°]	5267. 006 [°]	5263. 501 [°]
Valve size	1 E 2				1 E 2				1 E 2			
E	5262. 015 [°]	5264. 024 [°]	–	5263. 505 [°]	Use 1 E 2 300 x 150				5262. 016 [°]	5264. 025 [°]	5267. 020 [°]	5263. 506 [°]
Valve size	1 1/2 F 2				1 1/2 F 2				1 1/2 F 2			
F	5262. 029 [°]	5264. 039 [°]	–	5263. 510 [°]	5262. 030 [°]	5264. 040 [°]	–	5263. 511 [°]	5262. 031 [°]	5264. 041 [°]	5267. 035 [°]	5263. 512 [°]
Valve size	1 1/2 G 3				1 1/2 G 3				1 1/2 G 3			
G	5262. 045 [°]	5264. 110 [°]	–	5263. 516 [°]	5262. 046 [°]	5264. 111 [°]	–	5263. 517 [°]	5262. 047 [°]	5264. 112 [°]	5267. 052 [°]	5263. 518 [°]
Flange class	150 x 150				300L x 150				300 x 150			
Valve size	1 1/2 H 3				1 1/2 H 3				2 H 3			
H	5262. 142 [°]	5264. 152 [°]	–	5263. 523 [°]	5262. 143 [°]	5264. 153 [°]	–	5263. 524 [°]	5262. 144 [°]	5264. 154 [°]	5267. 148 [°]	5263. 525 [°]
Valve size	2 J 3				2 J 3				3 J 4			
J	5262. 162 [°]	5264. 196 [°]	–	5263. 529 [°]	5262. 163 [°]	5264. 197 [°]	–	5263. 530 [°]	5262. 164 [°]	5264. 198 [°]	5267. 168 [°]	5263. 531 [°]
Valve size	3 K 4				3 K 4				3 K 4			
K	5262. 202 [°]	5264. 211 [°]	–	5263. 535 [°]	Use 3 K 4 300 x 150				5262. 203 [°]	5264. 212 [°]	5267. 207 [°]	5263. 536 [°]
Flange class	150 x 150				300L x 150				300 x 150			
Valve size	3 L 4				3 L 4				4 L 6			
L	5262. 232 [°]	5264. 242 [°]	–	5263. 540 [°]	5262. 233 [°]	5264. 243 [°]	–	5263. 541 [°]	5262. 234 [°]	5264. 244 [°]	5267. 238 [°]	5263. 542 [°]
Valve size	4 M 6				4 M 6				4 M 6			
M	5262. 580 [°]	5264. 587 [°]	–	5263. 546 [°]	Use 4 M 6 300 x 150				5262. 581 [°]	5264. 588 [°]	5267. 584 [°]	5263. 547 [°]
Valve size	4 N 6				4 N 6				4 N 6			
N	5262. 590 [°]	5264. 597 [°]	–	5263. 550 [°]	Use 4 N 6 300 x 150				5262. 591 [°]	5264. 598 [°]	5267. 594 [°]	5263. 551 [°]
Valve size	4 P 6				4 P 6				4 P 6			
P	5262. 645 [°]	5264. 653 [°]	–	5263. 554 [°]	5262. 646 [°]	5264. 654 [°]	–	5263. 555 [°]	5262. 647 [°]	5264. 655 [°]	5267. 650 [°]	5263. 556 [°]
Valve size	6 Q 8				6 Q 8				6 Q 8			
Q	5262. 657 [°]	5264. 662 [°]	–	5263. 559 [°]	Use 6 Q 8 300 x 150				5262. 658 [°]	5264. 663 [°]	5267. 660 [°]	5263. 560 [°]
Valve size	6 R 8				6 R 8				6 R 10			
R	5262. 665 [°]	5264. 671 [°]	–	5263. 562 [°]	5262. 666 [°]	5264. 672 [°]	5267. 669 [°]	5263. 563 [°]	5262. 667 [°]	5264. 673 [°]	–	5263. 564 [°]
Valve size	8 T 10				8 T 10				8 T 10			
T	5262. 675 [°]	5264. 678 [°]	–	5263. 566 [°]	Use 8 T 10 300 x 150				5262. 676 [°]	5264. 679 [°]	5267. 677 [°]	5263. 567 [°]

Material	WCB	CF8M	WC6	LCB	WCB	CF8M	WC6	LCB	WCB	CF8M	WC6	LCB	WCB	CF8M	WC6	LCB
	1.0619	1.4408	1.7357		1.0619	1.4408	1.7357		1.0619	1.4408	1.7357		1.0619	1.4408	1.7357	
Flange class	600 x 150				900 x 300				1500 x 300				2500 x 300			
Valve size	1 D 2				1 1/2 D 2				1 1/2 D 2				1 1/2 D 3			
D	5262. 003 ^a	5264. 012 ^a	5267. 007 ^a	5263. 502 ^a	Use 1 1/2 D 2 1500 x 300				5262. 004 ^a	5264. 013 ^a	5267. 008 ^a	5263. 503 ^a	5262. 005 ^a	5264. 014 ^a	5267. 009 ^a	5263. 504 ^a
E	1 E 2				1 1/2 E 2				1 1/2 E 2				1 1/2 E 3			
	5262. 017 ^a	5264. 026 ^a	5267. 021 ^a	5263. 507 ^a	Use 1 1/2 E 2 1500 x 300				5262. 018 ^a	5264. 027 ^a	5267. 022 ^a	5263. 508 ^a	5262. 019 ^a	5264. 028 ^a	5267. 023 ^a	5263. 509 ^a
F	1 1/2 F 2				1 1/2 F 3				1 1/2 F 3				1 1/2 F 3			
	5262. 032 ^a	5264. 042 ^a	5267. 036 ^a	5263. 513 ^a	Use 1 1/2 F 3 1500 x 300				5262. 033 ^a	5264. 043 ^a	5267. 037 ^a	5263. 514 ^a	5262. 034 ^a	5264. 044 ^a	5267. 038 ^a	5263. 515 ^a
G	1 1/2 G 3				1 1/2 G 3				2 G 3				2 G 3			
	5262. 048 ^a	5264. 113 ^a	5267. 053 ^a	5263. 519 ^a	5262. 049 ^a	5264. 114 ^a	5267. 054 ^a	5263. 520 ^a	5262. 050 ^a	5264. 115 ^a	5267. 055 ^a	5263. 521 ^a	5262. 051 ^a	5264. 116 ^a	5267. 056 ^a	5263. 522 ^a
Flange class	600 x 150				900 x 150				1500 x 300							
Valve size	2 H 3				2 H 3				2 H 3							
H	5262. 145 ^a	5264. 155 ^a	5267. 149 ^a	5263. 526 ^a	5262. 146 ^a	5264. 156 ^a	5267. 150 ^a	5263. 527 ^a	5262. 147 ^a	5264. 157 ^a	5267. 151 ^a	5263. 528 ^a				
J	3 J 4				3 J 4				3 J 4							
	5262. 165 ^a	5264. 199 ^a	5267. 169 ^a	5263. 532 ^a	5262. 166 ^a	5264. 200 ^a	5267. 170 ^a	5263. 533 ^a	5262. 167 ^a	5264. 201 ^a	5267. 171 ^a	5263. 534 ^a				
K	3 K 4				3 K 6				3 K 6							
	5262. 204 ^a	5264. 213 ^a	5267. 208 ^a	5263. 537 ^a	5262. 205 ^a	5264. 214 ^a	5267. 209 ^a	5263. 538 ^a	5262. 206 ^a	5264. 215 ^a	5267. 210 ^a	5263. 539 ^a				
Flange class	600 x 150				900 x 150				1500 x 150							
Valve size	4 L 6				4 L 6				4 L 6							
L	5262. 235 ^a	5264. 245 ^a	5267. 239 ^a	5263. 543 ^a	5262. 236 ^a	5264. 246 ^a	5267. 240 ^a	5263. 544 ^a	5262. 237 ^a	–	5267. 241 ^a	5263. 545 ^a				
M	4 M 6				4 M 6											
	5262. 582 ^a	5264. 589 ^a	5267. 585 ^a	5263. 548 ^a	5262. 583 ^a	–	5267. 586 ^a	5263. 549 ^a								
N	4 N 6				4 N 6											
	5262. 592 ^a	5264. 599 ^a	5267. 595 ^a	5263. 552 ^a	5262. 593 ^a	–	5267. 596 ^a	5263. 553 ^a								
P	4 P 6				4 P 6											
	5262. 648 ^a	5264. 656 ^a	5267. 651 ^a	5263. 557 ^a	5262. 649 ^a	–	5267. 652 ^a	5263. 558 ^a								
Q	6 Q 8															
	5262. 659 ^a	5264. 664 ^a	5267. 661 ^a	5263. 561 ^a												
R	6 R 10															
	5262. 668 ^a	5264. 674 ^a	5267. 670 ^a	5263. 565 ^a												
T	8 T 10															
	–	–	–	–												

^a) Please add code for the required cap or lifting device.

Code for lifting device				
Lifting device	H2	H3	H4	H3
Bonnet	closed	closed	closed	open
WCB 1.0619, WC6 1.7357, LCB	2	3	4	5
CF8M 1.4408	2	–	4	–

Type 526


Dimensions

Metric units


Safety valve dimensions		[mm]	a	b	s	H _{max.}	H _{max.} with bellows	a	b	s	H _{max.}	H _{max.} with bellows	a	b	s	H _{max.}	H _{max.} with bellows	
Support brackets		[mm]	A	B	C	D	E	A	B	C	D	E	A	B	C	D	E	
Flange rating class		150 x 150						300L x 150					300 x 150					
Valve size		1 D 2						1 D 2					1 D 2					
D	d ₀ [mm]	14.0	105	114	30	440	465	Please see 1 D 2					105	114	30	440	465	
	A ₀ [mm²]	154	130	–	Ø 14	132	16	300 x 150					130	–	Ø 14	132	16	
E	1 E 2						1 E 2					1 E 2						
	d ₀ [mm]	14.0	105	114	30	440	465	Please see 1 E 2					105	114	30	440	465	
	A ₀ [mm²]	154	130	–	Ø 14	132	16	300 x 150					130	–	Ø 14	132	16	
F	1 ½ F 2						1 ½ F 2					1 ½ F 2						
	d ₀ [mm]	18.0	124	121	32	536	561	124	121	32	536	561	124	152	35	536	561	
	A ₀ [mm²]	254	162	–	Ø 14	148	16	162	–	Ø 14	148	16	162	–	Ø 14	148	16	
G	1 ½ G 3						1 ½ G 3					1 ½ G 3						
	d ₀ [mm]	22.5	124	121	32	536	574	124	121	32	536	574	124	152	35	536	574	
	A ₀ [mm²]	398	162	–	Ø 14	148	16	162	–	Ø 14	148	16	162	–	Ø 14	148	16	
Flange rating class		150 x 150						300L x 150					300 x 150					
Valve size		1 ½ H 3						1 ½ H 3					2 H 3					
H	d ₀ [mm]	28.3	130	124	38	542	580	130	124	38	542	580	130	124	43	666	692	
	A ₀ [mm²]	629	162	–	Ø 14	155	16	162	–	Ø 14	155	16	184	110	Ø 14	177	16	
J	2 J 3						2 J 3					3 J 4						
	d ₀ [mm]	36.0	137	124	49	673	722	137	124	49	673	722	184	181	49	786	824	
	A ₀ [mm²]	1018	184	110	Ø 14	184	16	184	110	Ø 14	184	16	238	140	Ø 18	234	25	
K	3 K 4						3 K 4					3 K 4						
	WCB, LCB, CF8M (WC6)	d ₀ [mm]	43.0	156	162	49	758	796	Please see 3 K 4					156	162	49	758	796
		A ₀ [mm²]	1452	238	140	Ø 18	206	25	300 x 150					238	140	Ø 18	206	25
WC6																		
Flange rating class		150 x 150						300L x 150					300 x 150					
Valve size		3 L 4						3 L 4					4 L 6					
L	d ₀ [mm]	53.5	156	165	49	758	796	156	165	49	758	796	179	181	49	853	886	
	A ₀ [mm²]	2248	238	140	Ø 18	206	25	238	140	Ø 18	206	25	278	160	Ø 18	262	25	
M	4 M 6						4 M 6					4 M 6						
	d ₀ [mm]	60.3	178	184	48	852	885	Please see 4 M 6					178	184	48	852	885	
	A ₀ [mm²]	2856	278	160	Ø 18	260	25	300 x 150					278	160	Ø 18	260	25	
N	4 N 6						4 N 6					4 N 6						
	d ₀ [mm]	66.0	197	210	48	871	904	Please see 4 N 6					197	210	48	871	904	
	A ₀ [mm²]	3421	278	160	Ø 18	280	25	300 x 150					278	160	Ø 18	280	25	
P	4 P 6						4 P 6					4 P 6						
	d ₀ [mm]	80.0	181	229	48	855	888	181	229	48	855	888	225	254	62	1079	1138	
	A ₀ [mm²]	5027	278	160	Ø 18	262	25	278	160	Ø 18	262	25	370	210	Ø 18	306	25	
Q	6 Q 8						6 Q 8					6 Q 8						
	d ₀ [mm]	105.5	240	241	68	1120	1200	Please see 6 Q 8					240	241	68	1120	1200	
	A ₀ [mm²]	8742	370	210	Ø 18	346	25	300 x 150					370	210	Ø 18	346	25	
R	6 R 8						6 R 8					6 R 10						
	d ₀ [mm]	126.0	240	241	68	1120	1200	240	241	68	1120	1200	240	267	68	1426	1426	
	A ₀ [mm²]	12568	370	210	Ø 18	346	25	370	210	Ø 18	346	25	470	150	Ø 18	460	25	
T	8 T 10						8 T 10					8 T 10						
	d ₀ [mm]	161.5	276	279	62	1462	1462	Please see 8 T 10					276	279	62	1462	1462	
	A ₀ [mm²]	20485	470	150	Ø 18	497	25	300 x 150					470	150	Ø 18	497	25	

d_0 = Actual orifice diameter
 A_0 = Actual orifice area


a	b	s	H _{max.}	H _{max.} with bellows	a	b	s	H _{max.}	H _{max.} with bellows	a	b	s	H _{max.}	H _{max.} with bellows	a	b	s	H _{max.}	H _{max.} with bellows
A	B	C	D	E	A	B	C	D	E	A	B	C	D	E	A	B	C	D	E
600 x 150					900 x 300					1500 x 300					2500 x 300				
1 D 2					1 1/2 D 2					1 1/2 D 2					1 1/2 D 3				
105	114	30	440	465	Please see 1 1/2 D 2 1500 x 300					105	140	44	517	542	140	178	57	576	576
130	-	Ø 14	132	16						162	-	Ø 14	129	16	162	-	Ø 14	189	16
1 E 2					1 1/2 E 2					1 1/2 E 2					1 1/2 E 3				
105	114	30	440	465	Please see 1 1/2 E 2 1500 x 300					105	140	44	517	542	140	178	57	576	576
130	-	Ø 14	132	16						162	-	Ø 14	129	16	162	-	Ø 14	189	16
1 1/2 F 2					1 1/2 F 3					1 1/2 F 3					1 1/2 F 3				
124	152	35	536	561	Please see 1 1/2 F 3 1500 x 300					124	165	44	560	560	140	178	57	576	576
162	-	Ø 14	148	16						162	-	Ø 14	174	16	162	-	Ø 14	189	16
1 1/2 G 3					1 1/2 G 3					2 G 3					2 G 3				
124	152	35	536	574	124	165	44	560	573	156	172	68	688	705	156	172	68	688	705
162	-	Ø 14	148	16	162	-	Ø 14	174	16	184	110	Ø 14	198	16	184	110	Ø 14	198	16
600 x 150					900 x 150					1500 x 300									
2 H 3					2 H 3					2 H 3									
154	162	56	691	717	154	162	56	691	717	154	162	56	691	717					
184	110	Ø 14	202	16	184	110	Ø 14	202	16	184	110	Ø 14	202	16					
3 J 4					3 J 4					3 J 4									
184	181	49	786	824	184	181	65	786	824	184	181	65	786	824					
238	140	Ø 18	234	25	238	140	Ø 18	234	25	238	140	Ø 18	234	25					
3 K 4					3 K 6					3 K 6									
184	181	49	786	824	198	216	67	880	880	197	216	65	879	879					
238	140	Ø 18	234	25	278	160	Ø 18	288	25	278	160	Ø 18	287	25					
156	162	49	758	796															
238	140	Ø 18	206	25															
600 x 150					900 x 150					1500 x 150									
4 L 6					4 L 6					4 L 6									
179	203	57	853	886	197	222	72	871	904	197	222	72	871	904					
278	160	Ø 18	262	25	278	160	Ø 18	280	25	278	160	Ø 18	280	25					
4 M 6					4 M 6														
178	203	56	852	885	197	222	72	871	904										
278	160	Ø 18	260	25	278	160	Ø 18	280	25										
4 N 6					4 N 6														
197	222	72	871	904	197	222	72	871	904										
278	160	Ø 18	280	25	278	160	Ø 18	280	25										
4 P 6					4 P 6														
225	254	62	1079	1138	225	254	62	1079	1138										
370	210	Ø 18	306	25	370	210	Ø 18	306	25										
6 Q 8																			
240	241	68	1120 ¹⁾	1200 ²⁾															
370	210	Ø 18	346	25															
6 R 10																			
240	267	68	1426	1426															
470	150	Ø 18	460	25															
-	-	-	-	-															
-	-	-	-	-															

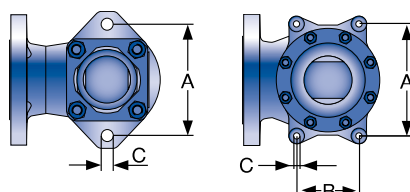

Support brackets

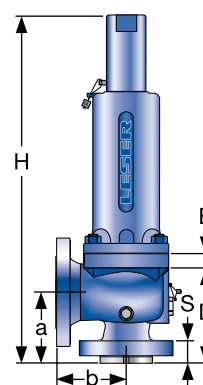

Conventional design

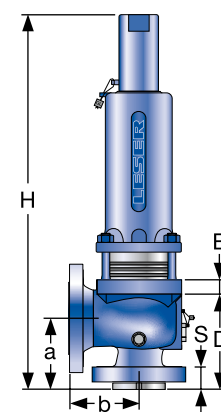

Balanced bellows design

¹⁾ Type 526 high pressure design: 1202

²⁾ Type 526 high pressure design: 1282

Type 526

Dimensions


US units

Type 526


Safety valve dimensions		[inch]	a	b	s	H _{max.}	H _{max.} with bellows	a	b	s	H _{max.}	H _{max.} with bellows	a	b	s	H _{max.}	H _{max.} with bellows	
Support brackets		[inch]	A	B	C	D	E	A	B	C	D	E	A	B	C	D	E	
Flange rating class			150 x 150					300L x 150					300 x 150					
Valve size			1 D 2					1 D 2					1 D 2					
D	d ₀ [inch]	0.551	4 1⁄8	4 1⁄2	1 3⁄16	17 5⁄16	18 5⁄16	Please see 1 D 2					4 1⁄8	4 1⁄2	1 3⁄16	17 5⁄16	18 5⁄16	
	A ₀ [inch²]	0.239	5 1⁄8	–	Ø 9⁄16	5 7⁄32	5⁄8	300 x 150					5 1⁄8	–	Ø 9⁄16	5 7⁄32	5⁄8	
E	d ₀ [inch]	0.551	4 1⁄8	4 1⁄2	1 3⁄16	17 5⁄16	18 5⁄16	Please see 1 E 2					4 1⁄8	4 1⁄2	1 3⁄16	17 5⁄16	18 5⁄16	
	A ₀ [inch²]	0.239	5 1⁄8	–	Ø 9⁄16	5 7⁄32	5⁄8	300 x 150					5 1⁄8	–	Ø 9⁄16	5 7⁄32	5⁄8	
F	d ₀ [inch]	0.709	4 7⁄8	4 3⁄4	1 1⁄4	21 3⁄32	22 3⁄32	4 7⁄8	4 3⁄4	1 1⁄4	21 3⁄32	22 3⁄32	4 7⁄8	6	1 13⁄32	21 3⁄32	22 3⁄32	
	A ₀ [inch²]	0.394	6 3⁄8	–	Ø 9⁄16	5 27⁄32	5⁄8	6 3⁄8	–	Ø 9⁄16	5 27⁄32	5⁄8	6 3⁄8	–	Ø 14	5 27⁄32	5⁄8	
G	d ₀ [inch]	0.886	4 7⁄8	4 3⁄4	1 1⁄4	21 3⁄32	22 19⁄32	4 7⁄8	4 3⁄4	1 1⁄4	21 3⁄32	22 19⁄32	4 7⁄8	6	1 13⁄32	21 3⁄32	22 19⁄32	
	A ₀ [inch²]	0.616	6 3⁄8	–	Ø 9⁄16	5 27⁄32	5⁄8	6 3⁄8	–	Ø 9⁄16	5 27⁄32	5⁄8	6 3⁄8	–	Ø 9⁄16	5 27⁄32	5⁄8	
Flange rating class			150 x 150					300L x 150					300 x 150					
Valve size			1 1⁄2 H 3					1 1⁄2 H 3					2 H 3					
H	d ₀ [inch]	1.11	5 1⁄8	4 7⁄8	1 1⁄2	21 11⁄32	22 27⁄32	5 1⁄8	4 7⁄8	1 1⁄2	21 11⁄32	22 27⁄32	5 1⁄8	4 7⁄8	1 11⁄16	26 7⁄32	27 1⁄4	
	A ₀ [inch²]	0.975	6 3⁄8	–	Ø 9⁄16	6 3⁄32	5⁄8	6 3⁄8	–	Ø 9⁄16	6 3⁄32	5⁄8	7 1⁄4	4 11⁄32	Ø 9⁄16	6 31⁄32	5⁄8	
J	d ₀ [inch]	1.42	5 3⁄8	4 7⁄8	1 15⁄16	26 1⁄2	28 7⁄16	5 3⁄8	4 7⁄8	1 15⁄16	26 1⁄2	28 7⁄16	7 1⁄4	7 1⁄8	1 15⁄16	30 15⁄16	32 7⁄16	
	A ₀ [inch²]	1.58	7 1⁄4	4 11⁄32	Ø 9⁄16	7 1⁄4	5⁄8	7 1⁄4	4 11⁄32	Ø 9⁄16	7 1⁄4	5⁄8	9 3⁄8	5 1⁄2	Ø 23⁄32	9 7⁄32	31⁄32	
K			3 K 4					3 K 4					3 K 4					
	WCB, LCB, CF8M (WC6)	d ₀ [inch]	1.69	6 1⁄8	6 3⁄8	1 15⁄16	29 27⁄32	23 11⁄32	Please see 3 K 4					6 1⁄8	6 3⁄8	1 15⁄16	29 27⁄32	31 11⁄32
		A ₀ [inch²]	2.25	9 3⁄8	5 1⁄2	Ø 23⁄32	8 3⁄32	31⁄32	300 x 150					9 3⁄8	5 1⁄2	Ø 23⁄32	8 3⁄32	31⁄32
WC6																		
Flange rating class			150 x 150					300L x 150					300 x 150					
Valve size			3 L 4					3 L 4					4 L 6					
L	d ₀ [inch]	2.11	6 1⁄8	6 1⁄2	1 15⁄16	29 27⁄32	31 11⁄12	6 1⁄8	6 1⁄2	1 15⁄16	29 27⁄32	31 11⁄12	7 1⁄6	7 1⁄8	1 15⁄16	33 19⁄32	34 7⁄8	
	A ₀ [inch²]	3.48	9 3⁄8	5 1⁄2	Ø 23⁄32	8 3⁄32	31⁄32	9 3⁄8	5 1⁄2	Ø 23⁄32	8 3⁄32	31⁄32	10 15⁄16	6 5⁄16	Ø 23⁄32	10 5⁄16	31⁄32	
M	d ₀ [inch]	2.37	7	7 1⁄4	1 7⁄8	33 17⁄32	34 27⁄32	Please see 4 M 6					7	7 1⁄4	1 7⁄8	33 17⁄32	34 27⁄32	
	A ₀ [inch²]	4.43	10 15⁄16	6 5⁄16	Ø 23⁄32	10 1⁄4	31⁄32	300 x 150					10 15⁄16	6 5⁄16	Ø 23⁄32	10 1⁄4	31⁄32	
N	d ₀ [inch]	2.60	7 3⁄4	8 1⁄4	1 7⁄8	34 9⁄32	35 19⁄32	Please see 4 N 6					7 3⁄4	8 1⁄4	1 7⁄8	34 9⁄32	35 19⁄32	
	A ₀ [inch²]	5.30	10 15⁄16	6 5⁄16	Ø 23⁄32	11	31⁄32	300 x 150					10 15⁄16	6 5⁄16	Ø 23⁄32	11	31⁄32	
P	d ₀ [inch]	3.15	7 1⁄8	9	1 7⁄8	33 31⁄32	34 31⁄32	7 1⁄8	9	1 7⁄8	33 31⁄32	34 31⁄32	8 7⁄8	10	2 7⁄16	42 1⁄2	44 13⁄16	
	A ₀ [inch²]	7.79	10 15⁄16	6 5⁄16	Ø 23⁄32	10 5⁄16	31⁄32	10 15⁄16	6 5⁄16	Ø 23⁄32	10 5⁄16	31⁄32	14 9⁄16	8 9⁄32	Ø 23⁄32	12 1⁄16	31⁄32	
Q	d ₀ [inch]	4.15	9 7⁄16	9 1⁄2	2 11⁄16	44 1⁄8	47 1⁄4	Please see 6 Q 8					9 7⁄16	9 1⁄2	2 11⁄16	44 1⁄8	47 1⁄4	
	A ₀ [inch²]	13.55	14 9⁄16	8 9⁄32	Ø 23⁄32	13 5⁄8	31⁄32	300 x 150					14 9⁄16	8 9⁄32	Ø 23⁄32	13 5⁄8	31⁄32	
R	d ₀ [inch]	4.96	9 7⁄16	9 1⁄2	2 11⁄16	44 1⁄8	47 1⁄4	9 7⁄16	9 1⁄2	2 11⁄16	41 5⁄8	44 3⁄4	9 7⁄16	10 1⁄2	2 11⁄16	56 1⁄8	56 1⁄8	
	A ₀ [inch²]	19.33	14 9⁄16	8 9⁄32	Ø 23⁄32	13 5⁄8	31⁄32	14 9⁄16	8 9⁄32	Ø 23⁄32	13 5⁄8	31⁄32	18 1⁄2	5 29⁄32	Ø 23⁄32	18 1⁄8	31⁄32	
T	d ₀ [inch]	6.36	10 7⁄8	11	2 7⁄16	57 9⁄16	57 9⁄16	Please see 8 T 10					10 7⁄8	11	2 7⁄16	57 9⁄16	57 9⁄16	
	A ₀ [inch²]	31.75	18 1⁄2	5 29⁄32	Ø 23⁄32	19 9⁄16	31⁄32	300 x 150					18 1⁄2	5 29⁄32	Ø 23⁄32	19 9⁄16	31⁄32	

d_0 = Actual orifice diameter
 A_0 = Actual orifice area


a	b	s	H _{max.}	H _{max.} with bellows	a	b	s	H _{max.}	H _{max.} with bellows	a	b	s	H _{max.}	H _{max.} with bellows	a	b	s	H _{max.}	H _{max.} with bellows
A	B	C	D	E	A	B	C	D	E	A	B	C	D	E	A	B	C	D	E
600 x 150					900 x 300					1500 x 300					2500 x 300				
1 D 2					1 1/2 D 2					1 1/2 D 2					1 1/2 D 3				
4 1/8	4 1/2	1 3/16	17 5/16	18 5/16	Please see 1 1/2 D 2 1500 x 300					4 1/8	5 1/2	1 3/4	20 11/32	21 11/32	5 1/2	7	2 1/4	22 11/16	22 11/16
5 1/8	—	Ø 9/16	5 7/32	5/8						6 3/8	—	Ø 9/16	5 3/32	5/8	6 3/8	—	Ø 9/16	7 15/32	5/8
1 E 2					1 1/2 E 2					1 1/2 E 2					1 1/2 E 3				
4 1/8	4 1/2	1 3/16	17 5/16	18 5/16	Please see 1 1/2 E 2 1500 x 300					4 1/8	5 1/2	1 3/4	20 11/32	21 11/32	5 1/2	7	2 1/4	22 11/16	22 11/16
5 1/8	—	Ø 9/16	5 7/32	5/8						6 3/8	—	Ø 9/16	5 3/32	5/8	6 3/8	—	Ø 9/16	7 15/32	5/8
1 1/2 F 2					1 1/2 F 3					1 1/2 F 3					1 1/2 F 3				
4 7/8	6	1 13/32	21 3/32	22 3/32	Please see 1 1/2 F 3 1500 x 300					4 7/8	6 1/2	1 3/4	22 1/16	22 11/16	5 1/2	7	2 1/4	22 11/16	22 11/16
6 3/8	—	Ø 9/16	5 27/32	5/8						6 3/8	—	Ø 9/16	6 27/32	5/8	6 3/8	—	Ø 9/16	7 15/32	5/8
1 1/2 G 3					1 1/2 G 3					2 G 3					2 G 3				
4 7/8	6	1 13/32	21 3/32	22 19/32	4 7/8	6 1/2	1 3/4	22 1/16	22 9/16	6 1/8	6 3/4	2 11/16	27 3/32	27 3/4	6 1/8	6 3/4	2 11/16	27 3/32	27 3/4
6 3/8	—	Ø 9/16	5 27/32	5/8	6 3/8	—	Ø 14	6 27/32	5/8	7 1/4	4 11/32	Ø 9/16	7 13/16	5/8	7 1/4	4 11/32	Ø 9/16	7 13/16	5/8
600 x 150					900 x 150					1500 x 300									
2 H 3					2 H 3					2 H 3									
6 1/16	6 3/8	2 3/16	27 7/32	28 7/32	6 1/16	6 3/8	2 3/16	27 7/32	28 7/32	6 1/16	6 3/8	2 3/16	27 7/32	28 7/32					
7 1/4	4 11/32	Ø 9/16	7 15/16	5/8	7 1/4	4 11/32	Ø 9/16	7 15/16	5/8	7 1/4	4 11/32	Ø 9/16	7 15/16	5/8					
3 J 4					3 J 4					3 J 4									
7 1/4	7 1/8	1 15/16	30 15/16	32 7/16	7 1/4	7 1/8	2 9/16	30 15/16	32 7/16	7 1/4	7 1/8	2 9/16	30 15/16	32 7/16					
9 3/8	5 1/2	Ø 23/32	9 7/32	31/32	9 3/8	5 1/2	Ø 23/32	9 7/32	31/32	9 3/8	5 1/2	Ø 23/32	9 7/32	31/32					
3 K 4					3 K 6					3 K 6									
7 1/4	7 1/8	1 15/16	30 15/16	32 7/16	7 13/16	8 1/2	2 9/16	34 21/32	34 21/32	7 3/4	8 1/2	2 9/16	34 19/32	34 19/32					
9 3/8	5 1/2	Ø 23/32	9 7/32	31/32	10 15/16	6 5/16	Ø 23/32	11 11/32	31/32	10 15/16	6 5/16	Ø 23/32	10 15/16	31/32					
6 1/8	6 3/8	1 15/16	29 27/32	31 11/32															
9 3/8	5 1/2	Ø 23/32	8 3/32	31/32															
600 x 150					900 x 150					1500 x 150									
4 L 6					4 L 6					4 L 6									
7 1/16	8	2 1/4	33 19/32	34 7/8	7 3/4	8 3/4	2 3/4	34 9/32	35 19/32	7 3/4	8 3/4	2 3/4	34 9/32	35 19/32					
10 15/16	6 5/16	Ø 23/32	10 15/16	31/32	10 15/16	6 5/16	Ø 23/32	11	31/32	10 15/16	6 5/16	Ø 23/32	11	31/32					
4 M 6					4 M 6														
7	8	2 3/16	33 17/32	34 27/32	7 3/4	8 3/4	2 3/4	34 9/32	35 19/32										
10 15/16	6 5/16	Ø 23/32	10 1/4	31/32	10 15/16	6 5/16	Ø 23/32	11	31/32										
4 N 6					4 N 6														
7 3/4	8 3/4	2 3/4	34 9/32	35 19/32	7 3/4	8 3/4	2 3/4	34 9/32	35 19/32										
10 15/16	6 5/16	Ø 23/32	11	31/32	10 15/16	6 5/16	Ø 23/32	11	31/32										
4 P 6					4 P 6														
8 7/8	10	2 7/16	42 1/2	44 13/16	8 7/8	10	2 7/16	42 1/2	44 13/16										
14 9/16	8 9/32	Ø 23/32	12 1/16	31/32	14 9/16	8 9/32	Ø 23/32	12 1/16	31/32										
6 Q 8																			
9 7/16	9 1/2	2 11/16	44 1/8 ¹⁾	47 1/4 ²⁾															
14 9/16	8 9/32	Ø 23/32	13 5/8	31/32															
6 R 10																			
9 7/16	10 1/2	2 11/16	56 1/8	56 1/8															
18 1/2	5 29/32	Ø 23/32	18 1/8	31/32															
—																			
—																			
—																			

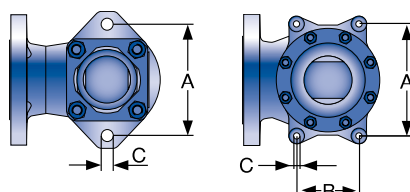

Support brackets

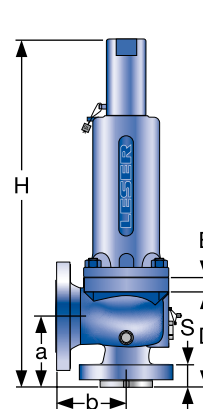

Conventional design

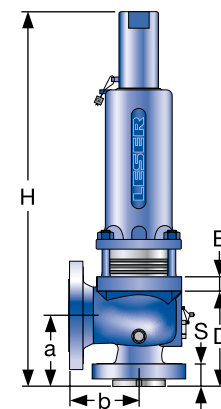

Balanced bellows design

¹⁾ Type 526 high pressure design: 47 5/16
²⁾ Type 526 high pressure design: 50 1/2

Type 526

Weights

Metric units

Type 526

Bonnet		all						
Lifting device		all						
Flange class		150 x 150	300L x 150	300 x 150	600 x 150	900 x 300	1500 x 300	2500 x 300
Valve size		1 D 2	1 D 2	1 D 2	1 D 2	1 1/2 D 2	1 1/2 D 2	1 1/2 D 3
D	Weight [kg]	17.3	17.3	17.3	17.3	31.1	31.1	41.8
	with bellows [kg]	18.4	18.4	18.4	18.4	33.1	33.1	44.6
E	Weight [kg]	17.3	17.3	17.3	17.3	31.1	31.1	41.8
	with bellows [kg]	18.4	18.4	18.4	18.4	33.1	33.1	44.6
F	Weight [kg]	30.6	30.6	32.5	32.5	36.3	36.3	41.8
	with bellows [kg]	33.1	33.1	35.0	35.0	38.6	38.6	44.6
G	Weight [kg]	30.6	30.6	32.5	32.5	36.3	69.9	69.9
	with bellows [kg]	33.1	33.1	35.0	35.0	38.6	72.5	72.5
Flange class		150 x 150	300L x 150	300 x 150	600 x 150	900 x 150	1500 x 300	
Valve size		1 1/2 H 3	1 1/2 H 3	2 H 3	2 H 3	2 H 3	2 H 3	
H	Weight [kg]	30.6	30.6	44.6	62.2	62.2	62.2	
	with bellows [kg]	33.1	33.1	48.4	65.3	65.3	65.3	
J	Weight [kg]	44.6	44.6	77.7	77.7	100.2	100.2	
	with bellows [kg]	48.4	48.4	83.2	83.2	105.7	105.7	
K	Weight [kg]	70.1	70.1	70.1	77.7	127.5	127.5	
	with bellows [kg]	75.7	75.7	75.7	83.2	134.1	134.1	
					Other	WC6		
Flange class		150 x 150	300L x 150	300 x 150	600 x 150	900 x 150	1500 x 150	
Valve size		3 L 4	3 L 4	4 L 6	4 L 6	4 L 6	4 L 6	
L	Weight [kg]	70.1	70.1	112.2	122.0	134.1	127.5	
	with bellows [kg]	75.7	75.7	118.8	128.6	140.7	134.1	
M	Weight [kg]	112.1	112.1	112.1	122.0	134.1		
	with bellows [kg]	118.7	118.7	118.7	128.6	140.7		
N	Weight [kg]	128.6	128.6	128.6	134.1	134.1		
	with bellows [kg]	135.2	135.2	135.2	140.7	140.7		
P	Weight [kg]	107.7	107.7	164.0	164.0	164.0		
	with bellows [kg]	114.8	114.8	172.0	172.0	172.0		
Q	Weight [kg]	221.0	221.0	221.0	221.0			
	with bellows [kg]	230.0	230.0	230.0	230.0			
R	Weight [kg]	221.0	221.0	277.0	277.0			
	with bellows [kg]	230.0	230.0	288.0	288.0			
T	Weight [kg]	287.0	287.0	287.0				
	with bellows [kg]	298.0	298.0	298.0				

Type 526

Weighths

US units

Bonnet		all						
Lifting device		all						
Flange class		150 x 150	300L x 150	300 x 150	600 x 150	900 x 300	1500 x 300	2500 x 300
Valve size		1 D 2	1 D 2	1 D 2	1 D 2	1 1/2 D 2	1 1/2 D 2	1 1/2 D 3
D	Weight [lbs]	38.1	38.1	38.1	38.1	68.6	68.6	92.2
	with bellows [lbs]	40.6	40.6	40.6	40.6	73.0	73.0	98.3
E	Weight [lbs]	38.1	38.1	38.1	38.1	68.6	68.6	92.2
	with bellows [lbs]	40.6	40.6	40.6	40.6	73.0	73.0	98.3
F	Weight [lbs]	67.5	67.5	71.7	71.7	80.0	80.0	92.2
	with bellows [lbs]	73.0	73.0	77.2	77.2	85.1	85.1	98.3
G	Weight [lbs]	67.5	67.5	71.7	71.7	80.0	154.1	154.1
	with bellows [lbs]	73.0	73.0	77.2	77.2	85.0	159.9	159.9
Flange class		150 x 150	300L x 150	300 x 150	600 x 150	900 x 150	1500 x 300	
Valve size		1 1/2 H 3	1 1/2 H 3	2 H 3	2 H 3	2 H 3	2 H 3	
H	Weight [lbs]	67.5	67.5	98.3	137.2	137.2	137.2	
	with bellows [lbs]	73.0	73.0	106.7	144.0	144.0	144.0	
J	Weight [lbs]	98.3	98.3	171.3	171.3	220.9	220.9	
	with bellows [lbs]	106.7	106.7	183.5	183.5	233.1	233.1	
K	Weight [lbs]	154.6	154.6	154.6	171.3	281.1	281.1	
	with bellows [lbs]	166.9	166.9	166.9	183.5	295.7	295.7	
Flange class		150 x 150	300L x 150	300 x 150	600 x 150	900 x 150	1500 x 150	
Valve size		3 L 4	3 L 4	4 L 6	4 L 6	4 L 6	4 L 6	
L	Weight [lbs]	154.6	154.6	247.4	269.0	295.7	281.1	
	with bellows [lbs]	166.9	166.9	262.0	283.6	310.2	295.7	
M	Weight [lbs]	247.2	247.2	247.2	269.0	295.7		
	with bellows [lbs]	261.7	261.7	261.7	283.6	310.2		
N	Weight [lbs]	283.6	283.6	283.6	295.7	295.7		
	with bellows [lbs]	298.1	298.1	298.1	310.2	310.2		
P	Weight [lbs]	237.5	237.5	361.6	361.6	361.6		
	with bellows [lbs]	253.1	253.1	379.2	379.2	379.2		
Q	Weight [lbs]	487.3	487.3	487.3	487.3			
	with bellows [lbs]	507.2	507.2	507.2	507.2			
R	Weight [lbs]	487.3	487.3	610.8	610.8			
	with bellows [lbs]	507.2	507.2	635.0	635.0			
T	Weight [lbs]	632.8	632.8	632.8				
	with bellows [lbs]	657.1	657.1	657.1				

Type 526

Orifice D

Pressure temperature ratings

Metric units

Valve size	1 D 2	1 D 2	1 D 2	1 D 2	1 1/2 D 2	1 1/2 D 2	1 1/2 D 3
Flange rating class Inlet x Outlet	150 x 150	300L x 150	300 x 150	600 x 150	900 x 300	1500 x 300	2500 x 300
Actual Orifice diameter d_o [mm]	14.0	14.0	14.0	14.0	14.0	14.0	14.0
Actual Orifice area A_o [mm ²]	154	154	154	154	154	154	154
Minimum set pressure [bar] S/G/L	0.3	0.3	0.3	0.3	5.0	5.0	18.5
Minimum set pressure [bar] S/G	3.5	3.5	3.5	11.0	24.0	24.0	24.0
Balanced bellows Inconel [bar] L	3.5	3.5	3.5	11.0	11.0	11.0	11.0
Body material: WCB 1.0619							
Pressure range p [bar] S/G/L							
Article numbers	5262.001^a		5262.002^a	5262.003^a		5262.004^a	5262.005^a
Maximum set pressure	-29 to 38 °C	19.7	51.0	102.1		255.5	413.8
	232 °C	12.8	42.4	85.2		212.4	354.1
	427 °C	5.5	28.3	56.9	Use 1 1/2 D 2 1500 x 300	142.1	236.6
Outlet pressure limit Conventional design	19.7	Use 1 D 2 300 x 150	19.7	19.7		41.4	51.0
Outlet pressure limit Balanced bellows design	15.9		15.9	15.9		34.5	34.5
Body material: CF8M 1.4408							
Pressure range p [bar] S/G/L							
Article numbers	5264.010^a		5264.011^a	5264.012^a		5264.013^a	5264.014^a
Maximum set pressure	-268 to -60 °C	19.0	49.7	99.3		248.3	275.9
	-59 to -29 °C	19.0	49.7	99.3		248.3	413.8
	-28 to 38 °C	19.0	49.7	99.3		248.3	413.8
	232 °C	12.4	34.1	67.2	Use 1 1/2 D 2 1500 x 300	171.0	284.8
	427 °C	5.5	29.0	58.3		145.5	242.8
	538 °C	1.4	24.1	48.3		120.7	201.0
Outlet pressure limit Conventional design	19.0	Use 1 D 2 300 x 150	19.0	19.0		41.4	49.7
Outlet pressure limit Balanced bellows design	15.9		15.9	15.9		34.5	34.5
Body material: WC6 1.7357							
Pressure range p [bar] S/G/L							
Article numbers	5267.006^a		5267.007^a			5267.008^a	5267.009^a
Maximum set pressure	427 °C	–	35.2	70.0		175.2	291.7
	538 °C	–	14.8	29.7	Use 1 1/2 D 2 1500 x 300	74.5	124.1
Outlet pressure limit Conventional design	–	Use 1 D 2 300 x 150	19.7	19.7		41.4	51.0
Outlet pressure limit Balanced bellows design	–		15.9	15.9		34.5	34.5
Body material: LCB							
Pressure range p [bar] S/G/L							
Article numbers	5263.500^a		5263.501^a	5263.502^a		5263.503^a	5263.504^a
Maximum set pressure	-46 to 38 °C	18.4	48.0	96.0		240.1	400.1
	200 °C	13.8	42.5	85.1		212.7	354.4
	343 °C	8.4	36.4	72.8	Use 1 1/2 D 2 1500 x 300	182.0	303.3
Outlet pressure limit Conventional design	18.4	Use 1 D 2 300 x 150	18.4	18.4		41.4	48.0
Outlet pressure limit Balanced bellows design	15.9		15.9	15.9		34.5	34.5

^a Please add code for the required cap or lifting device. See page 11.

Remark: SA 352 Gr. LCB is not listed in the API 526. Pressure-Temperature Rating acc. to ASME B16.34 Table 2-1.3

The stated Pressure-Temperature Rating are taken from ASME B16.34 Table 2-1.3 if the maximum pressure is not limited by API 526.

Due to the extended material test certificate the LESER LCB can be applied as LCC, WCB, WCC and 1.0619 with the respective pressure-temperature range as well.

Type 526

Orifice D

Pressure temperature ratings

US units

Valve size	1 D 2	1 D 2	1 D 2	1 D 2	1 1/2 D 2	1 1/2 D 2	1 1/2 D 3
Flange rating class Inlet x Outlet	150 x 150	300L x 150	300 x 150	600 x 150	900 x 300	1500 x 300	2500 x 300
Actual Orifice diameter d_o [inch]	0.551	0.551	0.551	0.551	0.551	0.551	0.551
Actual Orifice area A_o [inch ²]	0.239	0.239	0.239	0.239	0.239	0.239	0.239
Minimum set pressure [psig] S/G/L	4.0	4.0	4.0	4.0	73.0	73.0	268.0
Minimum set pressure [psig] S/G	50.8	50.8	50.8	159.5	348.0	348.0	348.0
Balanced bellows Inconel [psig] L	50.8	50.8	50.8	159.5	159.5	159.5	159.5
Body material: WCB 1.0619							
Pressure range p [psig] S/G/L							
Article numbers	5262.001^a		5262.002^a	5262.003^a		5262.004^a	5262.005^a
Maximum set pressure	-20 to 100 °F	285	740	1480		3705	6000
	450 °F	185	615	1235		3080	5135
	800 °F	80	410	825	Use 1 1/2 D 2 1500 x 300	2060	3430
Outlet pressure limit Conventional design	285	Use 1 D 2 300 x 150	285	285		600	740
Outlet pressure limit Balanced bellows design	230		230	230		500	500
Body material: CF8M 1.4408							
Pressure range p [psig] S/G/L							
Article numbers	5264.010^a		5264.011^a	5264.012^a		5264.013^a	5264.014^a
Maximum set pressure	-450 to -76 °F	275	720	1440		3600	4000
	-75 to -21 °F	275	720	1440		3600	6000
	-20 to 100 °F	275	720	1440		3600	6000
	450 °F	180	495	975	Use 1 1/2 D 2 1500 x 300	2480	4130
	800 °F	80	420	845		2110	3520
	1000 °F	20	350	700		1750	2915
Outlet pressure limit Conventional design	275	Use 1 D 2 300 x 150	275	275		600	720
Outlet pressure limit Balanced bellows design	230		230	230		500	500
Body material: WC6 1.7357							
Pressure range p [psig] S/G/L							
Article numbers	5267.006^a		5267.007^a			5267.008^a	5267.009^a
Maximum set pressure	800 °F	–	510	1015		2540	4230
	1000 °F	–	215	430	Use 1 1/2 D 2 1500 x 300	1080	1800
Outlet pressure limit Conventional design	–	Use 1 D 2 300 x 150	285	285		600	740
Outlet pressure limit Balanced bellows design	–		230	230		500	500
Body material: LCB							
Pressure range p [psig] S/G/L							
Article numbers	5263.500^a		5263.501^a	5263.502^a		5263.503^a	5263.504^a
Maximum set pressure	-50 to 100 °F	265	695	1395		3480	5805
	400 °F	200	615	1230		3075	5125
	650 °F	125	535	1065	Use 1 1/2 D 2 1500 x 300	2665	4440
Outlet pressure limit Conventional design	265	Use 1 D 2 300 x 150	265	265		600	695
Outlet pressure limit Balanced bellows design	230		230	230		500	500

^{a)} Please add code for the required cap or lifting device. See page 11.

Remark: SA 352 Gr. LCB is not listed in the API 526. Pressure-Temperature Rating acc. to ASME B16.34 Table 2-1.3
The stated Pressure-Temperature Rating are taken from ASME B16.34 Table 2-1.3 if the maximum pressure is not limited by API 526.

Due to the extended material test certificate the LESER LCB can be applied as LCC, WCB, WCC and 1.0619
with the respective pressure-temperature range as well.

Type 526

Orifice E

Pressure temperature ratings

Metric units

Valve size	1 E 2	1 E 2	1 E 2	1 E 2	1 1/2 E 2	1 1/2 E 2	1 1/2 E 3
Flange rating class Inlet x Outlet	150 x 150	300L x 150	300 x 150	600 x 150	900 x 300	1500 x 300	2500 x 300
Actual Orifice diameter d_o [mm]	14.0	14.0	14.0	14.0	14.0	14.0	14.0
Actual Orifice area A_o [mm ²]	154	154	154	154	154	154	154
Minimum set pressure [bar] S/G/L	0.3	0.3	0.3	0.3	5.0	5.0	18.5
Minimum set pressure [bar] S/G	3.5	3.5	3.5	11.0	24.0	24.0	24.0
Balanced bellows Inconel [bar] L	3.5	3.5	3.5	11.0	11.0	11.0	11.0
Body material: WCB 1.0619							
Pressure range p [bar] S/G/L							
Article numbers	5262.015[□]		5262.016[□]	5262.017[□]		5262.018[□]	5262.019[□]
Maximum set pressure	-29 to 38 °C	19.7	51.0	102.1		255.5	413.8
	232 °C	12.8	42.4	85.2		212.4	354.1
	427 °C	5.5	28.3	56.9	Use 1 1/2 E 2 1500 x 300	142.1	236.6
Outlet pressure limit Conventional design	19.7	Use 1 E 2 300 x 150	19.7	19.7		41.4	51.0
Outlet pressure limit Balanced bellows design	15.9		15.9	15.9		34.5	34.5
Body material: CF8M 1.4408							
Pressure range p [bar] S/G/L							
Article numbers	5264.024[□]		5264.025[□]	5264.026[□]		5264.027[□]	5264.028[□]
Maximum set pressure	-268 to -60 °C	19.0	49.7	99.3		248.3	275.9
	-59 to -29 °C	19.0	49.7	99.3		248.3	413.8
	-28 to 38 °C	19.0	49.7	99.3		248.3	413.8
	232 °C	12.4	34.1	67.2	Use 1 1/2 E 2 1500 x 300	171.0	284.8
	427 °C	5.5	29.0	58.3		145.5	242.8
	538 °C	1.4	24.1	48.3		120.7	201.0
Outlet pressure limit Conventional design	19.0	Use 1 E 2 300 x 150	19.0	19.0		41.4	49.7
Outlet pressure limit Balanced bellows design	15.9		15.9	15.9		34.5	34.5
Body material: WC6 1.7357							
Pressure range p [bar] S/G/L							
Article numbers	–		5267.020[□]	5267.021[□]		5267.022[□]	5267.023[□]
Maximum set pressure	427 °C	–	35.2	70.0		175.2	291.7
	538 °C	–	14.8	29.7	Use 1 1/2 E 2 1500 x 300	74.5	124.1
Outlet pressure limit Conventional design	–	Use 1 E 2 300 x 150	19.7	19.7		41.4	51.0
Outlet pressure limit Balanced bellows design	–		15.9	15.9		34.5	34.5
Body material: LCB							
Pressure range p [bar] S/G/L							
Article numbers	5263.505[□]		5263.506[□]	5263.507[□]		5263.508[□]	5263.509[□]
Maximum set pressure	-46 to 38 °C	18.4	48.0	96.0		240.1	400.1
	200 °C	13.8	42.5	85.1		212.7	354.4
	343 °C	8.4	36.4	72.8	Use 1 1/2 E 2 1500 x 300	182.0	303.3
Outlet pressure limit Conventional design	18.4	Use 1 E 2 300 x 150	18.4	18.4		41.4	48.0
Outlet pressure limit Balanced bellows design	15.9		15.9	15.9		34.5	34.5

□ Please add code for the required cap or lifting device. See page 11.

Remark: SA 352 Gr. LCB is not listed in the API 526. Pressure-Temperature Rating acc. to ASME B16.34 Table 2-1.3

The stated Pressure-Temperature Rating are taken from ASME B16.34 Table 2-1.3 if the maximum pressure is not limited by API 526.

Due to the extended material test certificate the LESER LCB can be applied as LCC, WCB, WCC and 1.0619 with the respective pressure-temperature range as well.

Type 526

Orifice E

Pressure temperature ratings

US units

Valve size	1 E 2	1 E 2	1 E 2	1 E 2	1 1/2 E 2	1 1/2 E 2	1 1/2 E 3
Flange rating class Inlet x Outlet	150 x 150	300L x 150	300 x 150	600 x 150	900 x 300	1500 x 300	2500 x 300
Actual Orifice diameter d_o [inch]	0.551	0.551	0.551	0.551	0.551	0.551	0.551
Actual Orifice area A_o [inch ²]	0.239	0.239	0.239	0.239	0.239	0.239	0.239
Minimum set pressure [psig] S/G/L	4.0	4.0	4.0	4.0	73.0	73.0	268.0
Minimum set pressure [psig] S/G	50.8	50.8	50.8	159.5	348.0	348.0	348.0
Balanced bellows Inconel [psig] L	50.8	50.8	50.8	159.5	159.5	159.5	159.5
Body material: WCB 1.0619							
Pressure range p [psig] S/G/L							
Article numbers	5262.015^a		5262.016^a	5262.017^a		5262.018^a	5262.019^a
Maximum set pressure							
-20 to 100 °F	285		740	1480		3705	6000
450 °F	185		615	1235		3080	5135
800 °F	80		410	825		2060	3430
Outlet pressure limit							
Conventional design	285	Use 1 E 2 300 x 150	285	285	Use 1 1/2 E 2 1500 x 300	600	740
Outlet pressure limit							
Balanced bellows design	230		230	230		500	500
Body material: CF8M 1.4408							
Pressure range p [psig] S/G/L							
Article numbers	5264.024^a		5264.025^a	5264.026^a		5264.027^a	5264.028^a
Maximum set pressure							
-450 to -76 °F	275		720	1440		3600	4000
-75 to -21 °F	275		720	1440		3600	6000
-20 to 100 °F	275		720	1440		3600	6000
450 °F	180		495	975		2480	4130
800 °F	80		420	845		2110	3520
1000 °F	20		350	700		1750	2915
Outlet pressure limit							
Conventional design	275	Use 1 E 2 300 x 150	275	275	Use 1 1/2 E 2 1500 x 300	600	720
Outlet pressure limit							
Balanced bellows design	230		230	230		500	500
Body material: WC6 1.7357							
Pressure range p [psig] S/G/L							
Article numbers	5267.020^a		5267.021^a			5267.022^a	5267.023^a
Maximum set pressure							
800 °F	—		510	1015		2540	4230
1000 °F	—		215	430		1080	1800
Outlet pressure limit							
Conventional design	—	Use 1 E 2 300 x 150	285	285	Use 1 1/2 E 2 1500 x 300	600	740
Outlet pressure limit							
Balanced bellows design	—		230	230		500	500
Body material: LCB							
Pressure range p [psig] S/G/L							
Article numbers	5263.505^a		5263.506^a	5263.507^a		5263.508^a	5263.509^a
Maximum set pressure							
-50 to 100 °F	265		695	1395		3480	5805
400 °F	200		615	1230		3075	5125
650 °F	125		535	1065		2665	4440
Outlet pressure limit							
Conventional design	265	Use 1 E 2 300 x 150	265	265	Use 1 1/2 E 2 1500 x 300	600	695
Outlet pressure limit							
Balanced bellows design	230		230	230		500	500

^{a)} Please add code for the required cap or lifting device. See page 11.

Remark: SA 352 Gr. LCB is not listed in the API 526. Pressure-Temperature Rating acc. to ASME B16.34 Table 2-1.3
The stated Pressure-Temperature Rating are taken from ASME B16.34 Table 2-1.3 if the maximum pressure is not limited by API 526.

Due to the extended material test certificate the LESER LCB can be applied as LCC, WCB, WCC and 1.0619 with the respective pressure-temperature range as well.

Type 526

Orifice F

Pressure temperature ratings

Metric units

Valve size	1 ½ F 2	1 ½ F 2	1 ½ F 2	1 ½ F 2	1 ½ F 3	1 ½ F 3	1 ½ F 3	
Flange rating class Inlet x Outlet	150 x 150	300L x 150	300 x 150	600 x 150	900 x 300	1500 x 300	2500 x 300	
Actual Orifice diameter d ₀ [mm]	18.0	18.0	18.0	18.0	18.0	18.0	18.0	
Actual Orifice area A ₀ [mm²]	254	254	254	254	254	254	254	
Minimum set pressure [bar] S/G/L	0.3	0.3	0.3	0.3	0.3	0.3	0.3	
Minimum set pressure [bar] S/G	1.7	1.7	1.7	12.0	12.0	12.0	13.5	
Balanced bellows Inconel [bar] L	2.5	2.5	2.5	8.2	8.2	8.2	8.2	
Body material: WCB 1.0619								
Pressure range p [bar] S/G/L								
Article numbers	5262.029 ^a	5262.030 ^a	5262.031 ^a	5262.032 ^a	Use 1 ½ F 3 1500 x 300	5262.033 ^a	5262.034 ^a	
Maximum set pressure	-29 to 38 °C	19.7	19.7	51.0		102.1	255.5	344.8
	232 °C	12.8	19.7	42.4		85.2	212.4	344.8
	427 °C	5.5	19.7	28.3		56.9	142.1	236.6
Outlet pressure limit								
Conventional design	19.7	19.7	19.7	19.7		51.0	51.0	
Outlet pressure limit								
Balanced bellows design	15.9	15.9	15.9	15.9	34.5	34.5		
Body material: CF8M 1.4408								
Pressure range p [bar] S/G/L								
Article numbers	5264.039 ^a	5264.040 ^a	5264.041 ^a	5264.042 ^a	Use 1 ½ F 3 1500 x 300	5264.043 ^a	5264.044 ^a	
Maximum set pressure	-268 to -60 °C	19.0	19.0	49.7		99.3	151.7	234.5
	-59 to -29 °C	19.0	19.0	49.7		99.3	248.3	344.8
	-28 to 38 °C	19.0	19.0	49.7		99.3	248.3	344.8
	232 °C	12.4	19.0	34.1		67.2	171.0	284.8
	427 °C	5.5	19.0	29.0		58.3	145.5	242.8
	538 °C	1.4	19.0	24.1		48.3	120.7	201.0
Outlet pressure limit								
Conventional design	19.0	19.0	19.0	19.0		49.7	49.7	
Outlet pressure limit								
Balanced bellows design	15.9	15.9	15.9	15.9	34.5	34.5		
Body material: WC6 1.7357								
Pressure range p [bar] S/G/L								
Article numbers	–	–	5267.035 ^a	5267.036 ^a	Use 1 ½ F 3 1500 x 300	5267.037 ^a	5267.038 ^a	
Maximum set pressure	427 °C	–	–	35.2		70.0	175.2	291.7
	538 °C	–	–	14.8		29.7	74.5	124.1
Outlet pressure limit								
Conventional design	–	–	19.7	19.7		51.0	51.0	
Outlet pressure limit								
Balanced bellows design	–	–	15.9	15.9	34.5	34.5		
Body material: LCB								
Pressure range p [bar] S/G/L								
Article numbers	5263.510 ^a	5263.511 ^a	5263.512 ^a	5263.513 ^a	Use 1 ½ F 3 1500 x 300	5263.514 ^a	5263.515 ^a	
Maximum set pressure	-46 to 38 °C	18.4	18.4	48.0		96.0	240.1	344.8
	200 °C	13.8	18.4	42.5		85.1	212.7	344.8
	343 °C	8.4	18.4	36.4		72.8	182.0	303.3
Outlet pressure limit								
Conventional design	18.4	18.4	18.4	18.4		48.0	48.0	
Outlet pressure limit								
Balanced bellows design	15.9	15.9	15.9	15.9	34.5	34.5		

^a Please add code for the required cap or lifting device. See page 11.

Remark: SA 352 Gr. LCB is not listed in the API 526. Pressure-Temperature Rating acc. to ASME B16.34 Table 2-1.3

The stated Pressure-Temperature Rating are taken from ASME B16.34 Table 2-1.3 if the maximum pressure is not limited by API 526.

Due to the extended material test certificate the LESER LCB can be applied as LCC, WCB, WCC and 1.0619 with the respective pressure-temperature range as well.

Type 526

Orifice F

Pressure temperature ratings

US units

Valve size	1 1/2 F 2	1 1/2 F 2	1 1/2 F 2	1 1/2 F 2	1 1/2 F 3	1 1/2 F 3	1 1/2 F 3	
FFlange rating class Inlet x Outlet	150 x 150	300L x 150	300 x 150	600 x 150	900 x 300	1500 x 300	2500 x 300	
Actual Orifice diameter d ₀ [inch]	0.709	0.709	0.709	0.709	0.709	0.709	0.709	
Actual Orifice area A ₀ [inch²]	0.394	0.394	0.394	0.394	0.394	0.394	0.394	
Minimum set pressure [psig] S/G/L	4.0	4.0	4.0	4.0	4.0	4.0	4.0	
Minimum set pressure [psig] S/G	24.6	24.6	24.6	174.0	174.0	174.0	159.0	
Balanced bellows Inconel [psig] L	36.3	36.3	36.3	118.9	118.9	118.9	118.9	
Body material: WCB 1.0619								
Pressure range p [psig] S/G/L								
Article numbers	5262.029 ^o	5262.030 ^o	5262.031 ^o	5262.032 ^o	Use 1 1/2 F 3 1500 x 300	5262.033 ^o	5262.034 ^o	
Maximum set pressure	-20 to 100 °F	285	285	740		1480	3705	5000
	450 °F	185	285	615		1235	3080	5000
	800 °F	80	285	410		825	2060	3430
Outlet pressure limit Conventional design	285	285	285	285		740	740	
Outlet pressure limit Balanced bellows design	230	230	230	230	500	500		
Body material: CF8M 1.4408								
Pressure range p [psig] S/G/L								
Article numbers	5264.039 ^o	5264.040 ^o	5264.041 ^o	5264.042 ^o	Use 1 1/2 F 3 1500 x 300	5264.043 ^o	5264.044 ^o	
Maximum set pressure	-450 to -76 °F	275	275	720		1440	2200	3400
	-75 to -21 °F	275	275	720		1440	3600	5000
	-20 to 100 °F	275	275	720		1440	3600	5000
	450 °F	180	275	495		975	2480	4130
	800 °F	80	275	420		845	2110	3520
	1000 °F	20	275	350		700	1750	2915
Outlet pressure limit Conventional design	275	275	275	275		720	720	
Outlet pressure limit Balanced bellows design	230	230	230	230	500	500		
Body material: WC6 1.7357								
Pressure range p [psig] S/G/L								
Article numbers	–	–	5267.035 ^o	5267.036 ^o	Use 1 1/2 F 3 1500 x 300	5267.037 ^o	5267.038 ^o	
Maximum set pressure	800 °F	–	–	510		1015	2540	4230
	1000 °F	–	–	215		430	1080	1800
	Outlet pressure limit Conventional design	–	–	285		285	740	740
Outlet pressure limit Balanced bellows design	–	–	230	230		500	500	
Body material: LCB								
Pressure range p [psig] S/G/L								
Article numbers	5263.510 ^o	5263.511 ^o	5263.512 ^o	5263.513 ^o	Use 1 1/2 F 3 1500 x 300	5263.514 ^o	5263.515 ^o	
Maximum set pressure	-50 to 100 °F	265	265	695		1395	3480	5000
	400 °F	200	265	615		1230	3075	5000
	650 °F	125	265	535		1065	2665	4440
Outlet pressure limit Conventional design	265	265	265	265		695	695	
Outlet pressure limit Balanced bellows design	230	230	230	230	500	500		

^o) Please add code for the required cap or lifting device. See page 11.

Remark: SA 352 Gr. LCB is not listed in the API 526. Pressure-Temperature Rating acc. to ASME B16.34 Table 2-1.3
The stated Pressure-Temperature Rating are taken from ASME B16.34 Table 2-1.3 if the maximum pressure is not limited by API 526.

Due to the extended material test certificate the LESER LCB can be applied as LCC, WCB, WCC and 1.0619 with the respective pressure-temperature range as well.

Type 526

Orifice G

Pressure temperature ratings

Metric units

Valve size	1 1/2 G 3	1 1/2 G 3	1 1/2 G 3	1 1/2 G 3	1 1/2 G 3	2 G 3	2 G 3
Flange rating class Inlet x Outlet	150 x 150	300L x 150	300 x 150	600 x 150	900 x 300	1500 x 300	2500 x 300
Actual Orifice diameter d ₀ [mm]	22.5	22.5	22.5	22.5	22.5	22.5	22.5
Actual Orifice area A ₀ [mm ²]	398	398	398	398	398	398	398
Minimum set pressure [bar] S/G/L	0.2 ¹⁾	0.2 ¹⁾	0.2 ¹⁾	0.2 ¹⁾	0.2 ¹⁾	5.0	5.0
Minimum set pressure [bar] S/G	3.4	3.4	3.4	9.2	9.2	9.2	9.2
Balanced bellows Inconel [bar] L	3.2	3.2	3.2	18.5	18.5	18.5	18.5
Body material: WCB 1.0619							
Pressure range p [bar] S/G/L							
Article numbers	5262.045[□]	5262.046[□]	5262.047[□]	5262.048[□]	5262.049[□]	5262.050[□]	5262.051[□]
Maximum set pressure	-29 to 38 °C	19.7	19.7	51.0	102.1	153.1	255.5
	232 °C	12.8	19.7	42.4	85.2	127.2	255.5
	427 °C	5.5	19.7	28.3	56.9	85.2	236.6
Outlet pressure limit Conventional design		19.7	19.7	19.7	19.7	51.0	51.0
Outlet pressure limit Balanced bellows design		15.9	15.9	15.9	15.9	32.4	32.4
Body material: CF8M 1.4408							
Pressure range p [bar] S/G/L							
Article numbers	5264.110[□]	5264.111[□]	5264.112[□]	5264.113[□]	5264.114[□]	5264.115[□]	5264.116[□]
Maximum set pressure	-268 to -60 °C	19.0	19.0	49.7	99.3	149.0	179.3
	-59 to -29 °C	19.0	19.0	49.7	99.3	149.0	248.3
	-28 to 38 °C	19.0	19.0	49.7	99.3	149.0	248.3
	232 °C	12.4	19.0	34.1	67.2	102.4	255.5
	427 °C	5.5	19.0	29.0	58.3	87.2	242.8
	538 °C	1.4	19.0	24.1	48.3	72.4	201.0
Outlet pressure limit Conventional design		19.0	19.0	19.0	19.0	49.7	49.7
Outlet pressure limit Balanced bellows design		15.9	15.9	15.9	15.9	32.4	32.4
Body material: WC6 1.7357							
Pressure range p [bar] S/G/L							
Article numbers	–	–	5267.052[□]	5267.053[□]	5267.054[□]	5267.055[□]	5267.056[□]
Maximum set pressure	427 °C	–	–	35.2	70.0	105.2	255.5
	538 °C	–	–	14.8	29.7	44.8	124.1
Outlet pressure limit Conventional design		–	–	19.7	19.7	51.0	51.0
Outlet pressure limit Balanced bellows design		–	–	15.9	15.9	32.4	32.4
Body material: LCB							
Pressure range p [bar] S/G/L							
Article numbers	5263.516[□]	5263.517[□]	5263.518[□]	5263.519[□]	5263.520[□]	5263.521[□]	5263.522[□]
Maximum set pressure	-46 to 38 °C	18.4	18.4	48.0	96.0	144.1	255.5
	200 °C	13.8	18.4	42.5	85.1	127.6	255.5
	343 °C	8.4	18.4	36.4	72.8	109.2	255.5
Outlet pressure limit Conventional design		18.4	18.4	18.4	18.4	48.0	48.0
Outlet pressure limit Balanced bellows design		15.9	15.9	15.9	15.9	32.4	32.4

[□] Please add code for the required cap or lifting device. See page 11.

Remark: SA 352 Gr. LCB is not listed in the API 526. Pressure-Temperature Rating acc. to ASME B16.34 Table 2-1.3

The stated Pressure-Temperature Rating are taken from ASME B16.34 Table 2-1.3 if the maximum pressure is not limited by API 526.

Due to the extended material test certificate the LESER LCB can be applied as LCC, WCB, WCC and 1.0619 with the respective pressure-temperature range as well.

¹⁾ The pressure range 0.2 – 2.5 bar is outside of the type test approval acc. to ISO 4126-1 and AD 2000-Merkblatt A2 (CE).

Type 526

Orifice G

Pressure temperature ratings

US units

Valve size	1 1/2 G 3	1 1/2 G 3	1 1/2 G 3	1 1/2 G 3	1 1/2 G 3	2 G 3	2 G 3
Flange rating class Inlet x Outlet	150 x 150	300L x 150	300 x 150	600 x 150	900 x 300	1500 x 300	2500 x 300
Actual Orifice diameter d ₀ [inch]	0.886	0.886	0.886	0.886	0.886	0.886	0.886
Actual Orifice area A ₀ [inch ²]	0.616	0.616	0.616	0.616	0.616	0.616	0.616
Minimum set pressure [psig] S/G/L	3.0 ¹⁾	3.0 ¹⁾	3.0 ¹⁾	3.0 ¹⁾	3.0 ¹⁾	73.0	73.0
Minimum set pressure [psig] S/G	46.6	46.6	46.6	133.4	133.4	133.4	133.4
Balanced bellows Inconel [psig] L	46.4	46.4	46.4	268.0	268.0	268.0	268.0
Body material: WCB 1.0619							
Pressure range p [psig] S/G/L							
Article numbers	5262.045[□]	5262.046[□]	5262.047[□]	5262.048[□]	5262.049[□]	5262.050[□]	5262.051[□]
Maximum set pressure	-20 to 100 °F	285	285	740	1480	2220	3705
	450 °F	185	285	615	1235	1845	3705
	800 °F	80	285	410	825	1235	3430
Outlet pressure limit Conventional design	285	285	285	285	740	740	740
Outlet pressure limit Balanced bellows design	230	230	230	230	470	470	470
Body material: CF8M 1.4408							
Pressure range p [psig] S/G/L							
Article numbers	5264.110[□]	5264.111[□]	5264.112[□]	5264.113[□]	5264.114[□]	5264.115[□]	5264.116[□]
Maximum set pressure	-450 to -76 °F	275	275	720	1440	2160	2600
	-75 to -21 °F	275	275	720	1440	2160	3705
	-20 to 100 °F	275	275	720	1440	2160	3705
	450 °F	180	275	495	975	1485	3705
	800 °F	80	275	420	845	1265	3520
	1000 °F	20	275	350	700	1050	2915
Outlet pressure limit Conventional design	275	275	275	275	720	720	720
Outlet pressure limit Balanced bellows design	230	230	230	230	470	470	470
Body material: WC6 1.7357							
Pressure range p [psig] S/G/L							
Article numbers	–	–	5267.052[□]	5267.053[□]	5267.054[□]	5267.055[□]	5267.056[□]
Maximum set pressure	800 °F	–	510	1015	1525	2540	3705
	1000 °F	–	215	430	650	1080	1800
Outlet pressure limit Conventional design	–	–	285	285	740	740	740
Outlet pressure limit Balanced bellows design	–	–	230	230	470	470	470
Body material: LCB							
Pressure range p [psig] S/G/L							
Article numbers	5263.516[□]	5263.517[□]	5263.518[□]	5263.519[□]	5263.520[□]	5263.521[□]	5263.522[□]
Maximum set pressure	-50 to 100 °F	265	265	695	1395	2090	3705
	400 °F	200	265	615	1230	1845	3705
	650 °F	125	265	535	1065	1600	3705
Outlet pressure limit Conventional design	265	265	265	265	695	695	695
Outlet pressure limit Balanced bellows design	230	230	230	230	470	470	470

[□] Please add code for the required cap or lifting device. See page 11.

Remark: SA 352 Gr. LCB is not listed in the API 526. Pressure-Temperature Rating acc. to ASME B16.34 Table 2-1.3
The stated Pressure-Temperature Rating are taken from ASME B16.34 Table 2-1.3 if the maximum pressure is not limited by API 526.

Due to the extended material test certificate the LESER LCB can be applied as LCC, WCB, WCC and 1.0619 with the respective pressure-temperature range as well.

¹⁾ The pressure range 3.0 – 36.25 psig is outside of the type test approval acc. to ISO 4126-1 and AD 2000-Merkblatt A2 (CE).

Type 526

Orifice H

Pressure temperature ratings

Metric units

Valve size	1 1/2 H 3	1 1/2 H 3	2 H 3	2 H 3	2 H 3	2 H 3
Flange rating class Inlet x Outlet	150 x 150	300L x 150	300 x 150	600 x 150	900 x 150	1500 x 300
Actual Orifice diameter d_0 [mm]	28.3	28.3	28.3	28.3	28.3	28.3
Actual Orifice area A_0 [mm ²]	625	625	625	625	625	625
Minimum set pressure [bar] S/G/L	0.2	0.2	0.3	0.3	0.3	0.3
Minimum set pressure [bar] S/G	3.2	3.2	6.5	6.5	6.5	6.5
Balanced bellows Inconel [bar] L	3.2	3.2	12.0	12.0	12.0	12.0
Body material: WCB 1.0619						
Pressure range p [bar] S/G/L						
Article numbers	5262.142[□]	5262.143[□]	5262.144[□]	5262.145[□]	5262.146[□]	5262.147[□]
Maximum set pressure	-29 to 38 °C	19.7	19.7	51.0	102.1	153.1
	232 °C	12.8	19.7	42.4	85.2	127.2
	427 °C	5.5	19.7	28.3	56.9	85.2
Outlet pressure limit Conventional design	19.7	19.7	19.7	19.7	19.7	51.0
Outlet pressure limit Balanced bellows design	15.9	15.9	15.9	15.9	15.9	28.6
Body material: CF8M 1.4408						
Pressure range p [bar] S/G/L						
Article numbers	5264.152[□]	5264.153[□]	5264.154[□]	5264.155[□]	5264.156[□]	5264.157[□]
Maximum set pressure	-268 to -60 °C	19.0	19.0	49.7	99.3	102.4
	-59 to -29 °C	19.0	19.0	49.7	99.3	149.0
	-28 to 38 °C	19.0	19.0	49.7	99.3	149.0
	232 °C	12.4	19.0	34.1	67.2	102.4
	427 °C	5.5	19.0	29.0	58.3	87.2
	538 °C	1.4	19.0	24.1	48.3	72.4
Outlet pressure limit Conventional design	19.0	19.0	19.0	19.0	19.0	41.4
Outlet pressure limit Balanced bellows design	15.9	15.9	15.9	15.9	15.9	28.6
Body material: WC6 1.7357						
Pressure range p [bar] S/G/L						
Article numbers	–	–	5267.148[□]	5267.149[□]	5267.150[□]	5267.151[□]
Maximum set pressure	427 °C	–	35.2	70.0	105.2	175.2
	538 °C	–	14.8	29.7	44.8	74.5
Outlet pressure limit Conventional design	–	–	19.7	19.7	19.7	51.0
Outlet pressure limit Balanced bellows design	–	–	15.9	15.9	15.9	28.6
Body material: LCB						
Pressure range p [bar] S/G/L						
Article numbers	5263.523[□]	5263.524[□]	5263.525[□]	5263.526[□]	5263.527[□]	5263.528[□]
Maximum set pressure	-46 to 38 °C	18.4	18.4	48.0	96.0	144.1
	200 °C	13.8	18.4	42.5	85.1	127.6
	343 °C	8.4	18.4	36.4	72.8	109.2
Outlet pressure limit Conventional design	18.4	18.4	18.4	18.4	18.4	48.0
Outlet pressure limit Balanced bellows design	15.9	15.9	15.9	15.9	15.9	28.6

[□] Please add code for the required cap or lifting device. See page 11.

Remark: SA 352 Gr. LCB is not listed in the API 526. Pressure-Temperature Rating acc. to ASME B16.34 Table 2-1.3

The stated Pressure-Temperature Rating are taken from ASME B16.34 Table 2-1.3 if the maximum pressure is not limited by API 526.

Due to the extended material test certificate the LESER LCB can be applied as LCC, WCB, WCC and 1.0619 with the respective pressure-temperature range as well.

Type 526

Orifice H

Pressure temperature ratings

US units

Valve size	1 1/2 H 3	1 1/2 H 3	2 H 3	2 H 3	2 H 3	2 H 3
Flange rating class Inlet x Outlet	150 x 150	300L x 150	300 x 150	600 x 150	900 x 150	1500 x 300
Actual Orifice diameter d_o [inch]	1.11	1.11	1.11	1.11	1.11	1.11
Actual Orifice area A_o [inch ²]	0.975	0.975	0.975	0.975	0.975	0.975
Minimum set pressure [psig] S/G/L	3.0	3.0	4.0	4.0	4.0	4.0
Minimum set pressure [psig] S/G	46.4	46.4	94.3	94.3	94.3	94.3
Balanced bellows Inconel [psig] L	46.4	46.4	174.0	174.0	174.0	174.0
Body material: WCB 1.0619			Pressure range p [psig] S/G/L			
Article numbers	5262.142^o	5262.143^o	5262.144^o	5262.145^o	5262.146^o	5262.147^o
Maximum set pressure	-20 to 100 °F	285	285	740	1480	2220
	450 °F	185	285	615	1235	1845
	800 °F	80	285	410	825	1235
Outlet pressure limit Conventional design		285	285	285	285	740
Outlet pressure limit Balanced bellows design		230	230	230	230	415
Body material: CF8M 1.4408			Pressure range p [psig] S/G/L			
Article numbers	5264.152^o	5264.153^o	5264.154^o	5264.155^o	5264.156^o	5264.157^o
Maximum set pressure	-450 to -76 °F	275	275	720	1440	1485
	-75 to -21 °F	275	275	720	1440	2160
	-20 to 100 °F	275	275	720	1440	2160
	450 °F	180	275	495	975	1485
	800 °F	80	275	420	845	1265
	1000 °F	20	275	350	700	1050
Outlet pressure limit Conventional design		275	275	275	275	600
Outlet pressure limit Balanced bellows design		230	230	230	230	415
Body material: WC6 1.7357			Pressure range p [psig] S/G/L			
Article numbers	–	–	5267.148^o	5267.149^o	5267.150^o	5267.151^o
Maximum set pressure	800 °F	–	–	510	1015	1525
	1000 °F	–	–	215	430	650
Outlet pressure limit Conventional design		–	–	285	285	285
Outlet pressure limit Balanced bellows design		–	–	230	230	230
Body material: LCB			Pressure range p [psig] S/G/L			
Article numbers	5263.523^o	5263.524^o	5263.525^o	5263.526^o	5263.527^o	5263.528^o
Maximum set pressure	-50 to 100 °F	265	265	695	1395	2090
	400 °F	200	265	615	1230	1845
	650 °F	125	265	535	1065	1600
Outlet pressure limit Conventional design		265	265	265	265	695
Outlet pressure limit Balanced bellows design		230	230	230	230	415

^o) Please add code for the required cap or lifting device. See page 11.

Remark: SA 352 Gr. LCB is not listed in the API 526. Pressure-Temperature Rating acc. to ASME B16.34 Table 2-1.3
The stated Pressure-Temperature Rating are taken from ASME B16.34 Table 2-1.3 if the maximum pressure is not limited by API 526.

Due to the extended material test certificate the LESER LCB can be applied as LCC, WCB, WCC and 1.0619 with the respective pressure-temperature range as well.

Type 526

Orifice J

Pressure temperature ratings

Metric units

Valve size	2 J 3	2 J 3	3 J 4	3 J 4	3 J 4	3 J 4
Flange rating class Inlet x Outlet	150 x 150	300L x 150	300 x 150	600 x 150	900 x 150	1500 x 300
Actual Orifice diameter d_0 [mm]	36.0	36.0	36.0	36.0	36.0	36.0
Actual Orifice area A_0 [mm ²]	1018	1018	1018	1018	1018	1018
Minimum set pressure [bar] S/G/L	0.2	0.2	0.8	0.8	0.8	0.8
Minimum set pressure [bar] S/G	3.5	3.5	3.5	3.5	3.5	3.5
Balanced bellows Inconel [bar] L	5.0	5.0	5.0	5.0	5.0	5.0
Body material: WCB 1.0619						
Pressure range p [bar] S/G/L						
Article numbers	5262.162[□]	5262.163[□]	5262.164[□]	5262.165[□]	5262.166[□]	5262.167[□]
Maximum set pressure	-29 to 38 °C	19.7	19.7	51.0	102.1	153.1
	232 °C	12.8	19.7	42.4	85.2	127.2
	427 °C	5.5	19.7	28.3	56.9	85.2
Outlet pressure limit Conventional design	19.7	19.7	19.7	19.7	19.7	41.4
Outlet pressure limit Balanced bellows design	15.9	15.9	15.9	15.9	15.9	15.9
Body material: CF8M 1.4408						
Pressure range p [bar] S/G/L						
Article numbers	5264.196[□]	5264.197[□]	5264.198[□]	5264.199[□]	5264.200[□]	5264.201[□]
Maximum set pressure	-268 to -60 °C	19.0	19.0	34.5	43.1	55.2
	-59 to -29 °C	19.0	19.0	49.7	99.3	149.0
	-28 to 38 °C	19.0	19.0	49.7	99.3	149.0
	232 °C	12.4	19.0	34.1	67.2	102.4
	427 °C	5.5	19.0	29.0	58.3	87.2
	538 °C	1.4	19.0	24.1	48.3	72.4
Outlet pressure limit Conventional design	19.0	19.0	19.0	19.0	19.0	41.4
Outlet pressure limit Balanced bellows design	15.9	15.9	15.9	15.9	15.9	15.9
Body material: WC6 1.7357						
Pressure range p [bar] S/G/L						
Article numbers	–	–	5267.168[□]	5267.169[□]	5267.170[□]	5267.171[□]
Maximum set pressure	427 °C	–	35.2	70.0	105.2	175.2
	538 °C	–	14.8	29.7	44.8	74.5
Outlet pressure limit Conventional design	–	–	19.7	19.7	19.7	41.4
Outlet pressure limit Balanced bellows design	–	–	15.9	15.9	15.9	15.9
Body material: LCB						
Pressure range p [bar] S/G/L						
Article numbers	5263.529[□]	5263.530[□]	5263.531[□]	5263.532[□]	5263.533[□]	5263.534[□]
Maximum set pressure	-46 to 38 °C	18.4	18.4	48.0	96.0	144.1
	200 °C	13.8	18.4	42.5	85.1	127.6
	343 °C	8.4	18.4	36.4	72.8	109.2
Outlet pressure limit Conventional design	18.4	18.4	18.4	18.4	18.4	41.4
Outlet pressure limit Balanced bellows design	15.9	15.9	15.9	15.9	15.9	15.9

[□] Please add code for the required cap or lifting device. See page 11.

Remark: SA 352 Gr. LCB is not listed in the API 526. Pressure-Temperature Rating acc. to ASME B16.34 Table 2-1.3

The stated Pressure-Temperature Rating are taken from ASME B16.34 Table 2-1.3 if the maximum pressure is not limited by API 526.

Due to the extended material test certificate the LESER LCB can be applied as LCC, WCB, WCC and 1.0619 with the respective pressure-temperature range as well.

Type 526

Orifice J

Pressure temperature ratings

US units

Valve size	2 J 3	2 J 3	3 J 4	3 J 4	3 J 4	3 J 4
Flange rating class Inlet x Outlet	150 x 150	300L x 150	300 x 150	600 x 150	900 x 150	1500 x 300
Actual Orifice diameter d_0 [inch]	1.42	1.42	1.42	1.42	1.42	1.42
Actual Orifice area A_0 [inch ²]	1.58	1.58	1.58	1.58	1.58	1.58
Minimum set pressure [psig] S/G/L	3.0	3.0	12.0	12.0	12.0	12.0
Minimum set pressure [psig] S/G	50.8	50.8	50.8	50.8	50.8	50.8
Balanced bellows Inconel [psig] L	72.5	72.5	72.5	72.5	72.5	72.5
Body material: WCB 1.0619						
Pressure range p [psig] S/G/L						
Article numbers	5262.162[□]	5262.163[□]	5262.164[□]	5262.165[□]	5262.166[□]	5262.167[□]
Maximum set pressure	-20 to 100 °F	285	285	740	1480	2700
	450 °F	185	285	615	1235	2700
	800 °F	80	285	410	825	2060
Outlet pressure limit Conventional design	285	285	285	285	285	600
Outlet pressure limit Balanced bellows design	230	230	230	230	230	230
Body material: CF8M 1.4408						
Pressure range p [psig] S/G/L						
Article numbers	5264.196[□]	5264.197[□]	5264.198[□]	5264.199[□]	5264.200[□]	5264.201[□]
Maximum set pressure	-450 to -76 °F	275	275	500	625	800
	-75 to -21 °F	275	275	720	1440	2700
	-20 to 100 °F	275	275	720	1440	2700
	450 °F	180	275	495	975	2480
	800 °F	80	275	420	845	2110
	1000 °F	20	275	350	700	1750
Outlet pressure limit Conventional design	275	275	275	275	275	600
Outlet pressure limit Balanced bellows design	230	230	230	230	230	230
Body material: WC6 1.7357						
Pressure range p [psig] S/G/L						
Article numbers	–	–	5267.168[□]	5267.169[□]	5267.170[□]	5267.171[□]
Maximum set pressure	800 °F	–	510	1015	1525	2540
	1000 °F	–	215	430	650	1080
Outlet pressure limit Conventional design	–	–	285	285	285	600
Outlet pressure limit Balanced bellows design	–	–	230	230	230	230
Body material: LCB						
Pressure range p [psig] S/G/L						
Article numbers	5263.529[□]	5263.530[□]	5263.531[□]	5263.532[□]	5263.533[□]	5263.534[□]
Maximum set pressure	-50 to 100 °F	265	265	695	1395	2700
	400 °F	200	265	615	1230	2700
	650 °F	125	265	535	1065	2665
Outlet pressure limit Conventional design	265	265	265	265	265	600
Outlet pressure limit Balanced bellows design	230	230	230	230	230	230

[□] Please add code for the required cap or lifting device. See page 11.

Remark: SA 352 Gr. LCB is not listed in the API 526. Pressure-Temperature Rating acc. to ASME B16.34 Table 2-1.3
The stated Pressure-Temperature Rating are taken from ASME B16.34 Table 2-1.3 if the maximum pressure is not limited by API 526.

Due to the extended material test certificate the LESER LCB can be applied as LCC, WCB, WCC and 1.0619 with the respective pressure-temperature range as well.

Type 526

Orifice K

Pressure temperature ratings

Metric units

Valve size	3 K 4	3 K 4	3 K 4	3 K 4	3 K 6	3 K 6	
Flange rating class Inlet x Outlet	150 x 150	300L x 150	300 x 150	600 x 150	900 x 150	1500 x 300	
Actual Orifice diameter d_0 [mm]	43.0	43.0	43.0	43.0	43.0	43.0	
Actual Orifice area A_0 [mm²]	1452	1452	1452	1452	1452	1452	
Minimum [bar] S/G/L	0.3	0.3	0.3	0.3	2.3	2.3	
set pressure only WC6					0.3	0.3	
Minimum set pressure [bar] S/G	2.2	2.2	2.2	5.6	5.6	5.6	
Balanced bellows Inconel [bar] L	2.5	2.5	2.5	6.5	6.5	6.5	
Body material: WCB 1.0619			Pressure range p [bar] S/G/L				
Article numbers	5262.202 [□]	Use 3 K 4 300 x 150	5262.203 [□]	5262.204 [□]	5262.205 [□]	5262.206 [□]	
Maximum set pressure	-29 to 38 °C		19.7	51.0	102.1	153.1	153.1
	232 °C		12.8	42.4	85.2	127.2	153.1
	427 °C		5.5	28.3	56.9	85.2	142.1
Outlet pressure limit			19.7	19.7	19.7	19.7	41.4
Conventional design							
Outlet pressure limit		10.3	10.3	13.8	13.8	13.8	
Balanced bellows design							
Body material: CF8M 1.4408			Pressure range p [bar] S/G/L				
Article numbers	5264.211 [□]	Use 3 K 4 300 x 150	5264.212 [□]	5264.213 [□]	5264.214 [□]	5264.215 [□]	
Maximum set pressure	-268 to -60 °C		19.0	36.2	41.4	41.4	51.7
	-59 to -29 °C		19.0	49.7	99.3	149.0	153.1
	-28 to 38 °C		19.0	49.7	99.3	149.0	153.1
	232 °C		12.4	34.1	67.2	102.4	153.1
	427 °C		5.5	29.0	58.3	87.2	145.5
	538 °C		1.4	24.1	48.3	72.4	120.7
Outlet pressure limit			19.0	19.0	19.0	19.0	41.4
Conventional design							
Outlet pressure limit		10.3	10.3	13.8	13.8	13.8	
Balanced bellows design							
Body material: WC6 1.7357			Pressure range p [bar] S/G/L				
Article numbers	–	Use 3 K 4 300 x 150	5267.207 [□]	5267.208 [□]	5267.209 [□]	5267.210 [□]	
Maximum set pressure	427 °C		–	35.2	70.0	105.2	153.1
	538 °C		–	14.8	29.7	44.8	74.5
Outlet pressure limit			–	19.7	19.7	19.7	41.4
Conventional design							
Outlet pressure limit		–	10.3	13.8	13.8	13.8	
Balanced bellows design							
Body material: LCB			Pressure range p [bar] S/G/L				
Article numbers	5263.535 [□]	Use 3 K 4 300 x 150	5263.536 [□]	5263.537 [□]	5263.538 [□]	5263.539 [□]	
Maximum set pressure	-46 to 38 °C		18.4	48.0	96.0	144.1	153.1
	200 °C		13.8	42.5	85.1	127.6	153.1
	343 °C		8.4	36.4	72.8	109.2	153.1
Outlet pressure limit			18.4	18.4	18.4	18.4	41.4
Conventional design							
Outlet pressure limit		10.3	10.3	13.8	13.8	13.8	
Balanced bellows design							

[□] Please add code for the required cap or lifting device. See page 11.

Remark: SA 352 Gr. LCB is not listed in the API 526. Pressure-Temperature Rating acc. to ASME B16.34 Table 2-1.3

The stated Pressure-Temperature Rating are taken from ASME B16.34 Table 2-1.3 if the maximum pressure is not limited by API 526.

Due to the extended material test certificate the LESER LCB can be applied as LCC, WCB, WCC and 1.0619 with the respective pressure-temperature range as well.

Type 526

Orifice K

Pressure temperature ratings

US units

Valve size	3 K 4	3 K 4	3 K 4	3 K 4	3 K 6	3 K 6
Flange rating class Inlet x Outlet	150 x 150	300L x 150	300 x 150	600 x 150	900 x 150	1500 x 300
Actual Orifice diameter d ₀ [inch]	1.69	1.69	1.69	1.69	1.69	1.69
Actual Orifice area A ₀ [inch²]	2.25	2.25	2.25	2.25	2.25	2.25
Minimum [psig] S/G/L	4.0	4.0	4.0	4.0	33.0	33.0
set pressure only WC6					4.0	4.0
Minimum set pressure [psig] S/G	31.9	31.9	31.9	81.2	81.2	81.2
Balanced bellows Inconel [psig] L	36.3	36.3	36.3	94.3	94.3	94.3
Body material: WCB 1.0619						
Pressure range p [psig] S/G/L						
Article numbers	5262.202 ^o	Use 3 K 4 300 x 150	5262.203 ^o	5262.204 ^o	5262.205 ^o	5262.206 ^o
Maximum set pressure	-20 to 100 °F 285		740	1480	2220	2220
	450 °F 185		615	1235	1845	2220
	800 °F 80		410	825	1235	2060
Outlet pressure limit	285		285	285	285	600
Conventional design						
Outlet pressure limit	150		150	200	200	200
Balanced bellows design						
Body material: CF8M 1.4408						
Pressure range p [psig] S/G/L						
Article numbers	5264.211 ^o	Use 3 K 4 300 x 150	5264.212 ^o	5264.213 ^o	5264.214 ^o	5264.215 ^o
Maximum set pressure	-450 to -76 °F 275		525	600	600	750
	-75 to -21 °F 275		720	1440	2160	2220
	-20 to 100 °F 275		720	1440	2160	2220
	450 °F 180		495	975	1485	2220
	800 °F 80		420	845	1265	2110
	1000 °F 20		350	700	1050	1750
Outlet pressure limit	275		275	275	275	600
Conventional design						
Outlet pressure limit	150		150	200	200	200
Balanced bellows design						
Body material: WC6 1.7357						
Pressure range p [psig] S/G/L						
Article numbers	—	Use 3 K 4 300 x 150	5267.207 ^o	5267.208 ^o	5267.209 ^o	5267.210 ^o
Maximum set pressure	800 °F —		510	1015	1525	2220
	1000 °F —		215	430	650	1080
Outlet pressure limit	—		285	285	285	600
Conventional design						
Outlet pressure limit	—		150	200	200	200
Balanced bellows design						
Body material: LCB						
Pressure range p [psig] S/G/L						
Article numbers	5263.535 ^o	Use 3 K 4 300 x 150	5263.536 ^o	5263.537 ^o	5263.538 ^o	5263.539 ^o
Maximum set pressure	-50 to 100 °F 265		695	1395	2090	2220
	400 °F 200		615	1230	1845	2220
	650 °F 125		535	1065	1600	2220
Outlet pressure limit	265		265	265	265	600
Conventional design						
Outlet pressure limit	150		150	200	200	200
Balanced bellows design						

^o Please add code for the required cap or lifting device. See page 11.

Remark: SA 352 Gr. LCB is not listed in the API 526. Pressure-Temperature Rating acc. to ASME B16.34 Table 2-1.3
The stated Pressure-Temperature Rating are taken from ASME B16.34 Table 2-1.3 if the maximum pressure is not limited by API 526.

Due to the extended material test certificate the LESER LCB can be applied as LCC, WCB, WCC and 1.0619 with the respective pressure-temperature range as well.

Type 526

Orifice L

Pressure temperature ratings

Metric units

Valve size	3 L 4	3 L 4	4 L 6	4 L 6	4 L 6	4 L 6
Flange rating class Inlet x Outlet	150 x 150	300L x 150	300 x 150	600 x 150	900 x 150	1500 x 150
Actual Orifice diameter d_0 [mm]	53.5	53.5	53.5	53.5	53.5	53.5
Actual Orifice area A_0 [mm ²]	2248	2248	2248	2248	2248	2248
Minimum set pressure [bar] S/G/L	0.3	0.3	0.2	0.2	0.2	0.2
Minimum set pressure [bar] S/G	3.5	3.5	3.5	3.5	3.5	3.5
Balanced bellows Inconel [bar] L	3.5	3.5	6.0	6.0	6.0	6.0
Body material: WCB 1.0619						
Pressure range p [bar] S/G/L						
Article numbers	5262.232[□]	5262.233[□]	5262.234[□]	5262.235[□]	5262.236[□]	5262.237[□]
Maximum set pressure	-29 to 38 °C	19.7	19.7	51.0	69.0	103.4
	232 °C	12.8	19.7	42.4	69.0	103.4
	427 °C	5.5	19.7	28.3	56.9	103.4
Outlet pressure limit Conventional design	19.7	19.7	19.7	19.7	19.7	19.7
Outlet pressure limit Balanced bellows design	6.9	6.9	11.7	11.7	11.7	11.7
Body material: CF8M 1.4408						
Pressure range p [bar] S/G/L						
Article numbers	5264.242[□]	5264.243[□]	5264.244[□]	5264.245[□]	5264.246[□]	-
Maximum set pressure	-268 to -60 °C	19.0	19.0	36.9	36.9	48.3
	-59 to -29 °C	19.0	19.0	49.7	69.0	103.4
	-28 to 38 °C	19.0	19.0	49.7	69.0	103.4
	232 °C	12.4	19.0	34.1	67.2	102.4
	427 °C	5.5	19.0	29.0	58.3	87.2
	538 °C	1.4	19.0	24.1	48.3	72.4
Outlet pressure limit Conventional design	19.0	19.0	19.0	19.0	19.0	-
Outlet pressure limit Balanced bellows design	6.9	6.9	11.7	11.7	11.7	-
Body material: WC6 1.7357						
Pressure range p [bar] S/G/L						
Article numbers	-	-	5267.238[□]	5267.239[□]	5267.240[□]	5267.241[□]
Maximum set pressure	427 °C	-	35.2	69.0	103.4	103.4
	538 °C	-	14.8	29.7	44.8	74.5
Outlet pressure limit Conventional design	-	-	19.7	19.7	19.7	19.7
Outlet pressure limit Balanced bellows design	-	-	11.7	11.7	11.7	11.7
Body material: LCB						
Pressure range p [bar] S/G/L						
Article numbers	5263.540[□]	5263.541[□]	5263.542[□]	5263.543[□]	5263.544[□]	5263.545[□]
Maximum set pressure	-46 to 38 °C	18.4	18.4	48.0	69.0	103.4
	200 °C	13.8	18.4	42.5	69.0	103.4
	343 °C	8.4	18.4	36.4	69.0	103.4
Outlet pressure limit Conventional design	18.4	18.4	18.4	18.4	18.4	18.4
Outlet pressure limit Balanced bellows design	6.9	6.9	11.7	11.7	11.7	11.7

[□] Please add code for the required cap or lifting device. See page 11.

Remark: SA 352 Gr. LCB is not listed in the API 526. Pressure-Temperature Rating acc. to ASME B16.34 Table 2-1.3

The stated Pressure-Temperature Rating are taken from ASME B16.34 Table 2-1.3 if the maximum pressure is not limited by API 526.

Due to the extended material test certificate the LESER LCB can be applied as LCC, WCB, WCC and 1.0619 with the respective pressure-temperature range as well.

Type 526

Orifice L

Pressure temperature ratings

US units

Valve size	3 L 4	3 L 4	4 L 6	4 L 6	4 L 6	4 L 6
Flange rating class Inlet x Outlet	150 x 150	300L x 150	300 x 150	600 x 150	900 x 150	1500 x 150
Actual Orifice diameter d_0 [inch]	2.11	2.11	2.11	2.11	2.11	2.11
Actual Orifice area A_0 [inch ²]	3.48	3.48	3.48	3.48	3.48	3.48
Minimum set pressure [psig] S/G/L	4.0	4.0	3.0	3.0	3.0	3.0
Minimum set pressure [psig] S/G	50.8	50.8	50.8	50.8	50.8	50.8
Balanced bellows Inconel [psig] L	50.8	50.8	87.0	87.0	87.0	87.0
Body material: WCB 1.0619			Pressure range p [psig] S/G/L			
Article numbers	5262.232[□]	5262.233[□]	5262.234[□]	5262.235[□]	5262.236[□]	5262.237[□]
Maximum set pressure	-20 to 100 °F	285	285	740	1000	1500
	450 °F	185	285	615	1000	1500
	800 °F	80	285	410	825	1235
Outlet pressure limit Conventional design	285	285	285	285	285	285
Outlet pressure limit Balanced bellows design	100	100	170	170	170	170
Body material: CF8M 1.4408			Pressure range p [psig] S/G/L			
Article numbers	5264.242[□]	5264.243[□]	5264.244[□]	5264.245[□]	5264.246[□]	-
Maximum set pressure	-450 to -76 °F	275	275	535	535	700
	-75 to -21 °F	275	275	720	1000	1500
	-20 to 100 °F	275	275	720	1000	1500
	450 °F	180	275	495	975	1485
	800 °F	80	275	420	845	1265
	1000 °F	20	275	350	700	1050
Outlet pressure limit Conventional design	275	275	275	275	275	-
Outlet pressure limit Balanced bellows design	100	100	170	170	170	-
Body material: WC6 1.7357			Pressure range p [psig] S/G/L			
Article numbers	-	-	5267.238[□]	5267.239[□]	5267.240[□]	5267.241[□]
Maximum set pressure	800 °F	-	510	1000	1500	1500
	1000 °F	-	215	430	650	1080
Outlet pressure limit Conventional design	-	-	285	285	285	285
Outlet pressure limit Balanced bellows design	-	-	170	170	170	170
Body material: LCB			Pressure range p [psig] S/G/L			
Article numbers	5263.540[□]	5263.541[□]	5263.542[□]	5263.543[□]	5263.544[□]	5263.545[□]
Maximum set pressure	-50 to 100 °F	265	265	695	1000	1500
	400 °F	200	265	615	1000	1500
	650 °F	125	265	535	1000	1500
Outlet pressure limit Conventional design	265	265	265	265	265	265
Outlet pressure limit Balanced bellows design	100	100	170	170	170	170

[□] Please add code for the required cap or lifting device. See page 11.

Remark: SA 352 Gr. LCB is not listed in the API 526. Pressure-Temperature Rating acc. to ASME B16.34 Table 2-1.3
The stated Pressure-Temperature Rating are taken from ASME B16.34 Table 2-1.3 if the maximum pressure is not limited by API 526.

Due to the extended material test certificate the LESER LCB can be applied as LCC, WCB, WCC and 1.0619 with the respective pressure-temperature range as well.

Type 526

Orifice M

Pressure temperature ratings

Metric units

Valve size	4 M 6	4 M 6	4 M 6	4 M 6	4 M 6	
Flange rating class Inlet x Outlet	150 x 150	300L x 150	300 x 150	600 x 150	900 x 150	
Actual Orifice diameter d_0 [mm]	60.3	60.3	60.3	60.3	60.3	
Actual Orifice area A_0 [mm²]	2846	2846	2846	2846	2846	
Minimum set pressure [bar] S/G/L	0.2	0.2	0.2	0.2	0.2	
Minimum set pressure [bar] S/G	2.6	2.6	2.6	6.3	10.5	
Balanced bellows Inconel [bar] L	2.2	2.2	2.2	10.5	10.5	
Body material: WCB 1.0619						
Pressure range p [bar] S/G/L						
Article numbers	5262.580 [□]	Use 4 M 6 300 x 150	5262.581 [□]	5262.582 [□]	5262.583 [□]	
Maximum set pressure	-29 to 38 °C		19.7	51.0	75.9	75.9
	232 °C		12.8	42.4	75.9	75.9
	427 °C		5.5	28.3	56.9	75.9
Outlet pressure limit						
Conventional design	19.7		19.7	19.7	19.7	
Outlet pressure limit						
Balanced bellows design	5.5		11.0	11.0	11.0	
Body material: CF8M 1.4408						
Pressure range p [bar] S/G/L						
Article numbers	5264.587 [□]	Use 4 M 6 300 x 150	5264.588 [□]	5264.589 [□]	–	
Maximum set pressure	-268 to -60 °C		19.0	36.2	41.4	–
	-59 to -29 °C		19.0	49.7	69.0	–
	-28 to 38 °C		19.0	49.7	69.0	–
	232 °C		12.4	34.1	67.2	–
	427 °C		5.5	29.0	58.3	–
	538 °C		1.4	24.1	48.3	–
Outlet pressure limit						
Conventional design	19.0		19.0	19.0	–	
Outlet pressure limit						
Balanced bellows design	5.5	11.0	11.0	–		
Body material: WC6 1.7357						
Pressure range p [bar] S/G/L						
Article numbers	–	Use 4 M 6 300 x 150	5267.584 [□]	5267.585 [□]	5267.586 [□]	
Maximum set pressure	427 °C		–	35.2	69.0	75.8
	538 °C		–	14.8	29.7	44.8
Outlet pressure limit						
Conventional design	–		19.7	19.7	19.7	
Outlet pressure limit						
Balanced bellows design	–	11.0	11.0	11.0		
Body material: LCB						
Pressure range p [bar] S/G/L						
Article numbers	5263.546 [□]	Use 4 M 6 300 x 150	5263.547 [□]	5263.548 [□]	5263.549 [□]	
Maximum set pressure	-46 to 38 °C		18.4	48.0	75.9	75.9
	200 °C		13.8	42.5	75.9	75.9
	343 °C		8.4	36.4	72.8	75.9
Outlet pressure limit						
Conventional design	18.4		18.4	18.4	18.4	
Outlet pressure limit						
Balanced bellows design	5.5	11.0	11.0	11.0		

□ Please add code for the required cap or lifting device. See page 11.

Remark: SA 352 Gr. LCB is not listed in the API 526. Pressure-Temperature Rating acc. to ASME B16.34 Table 2-1.3

The stated Pressure-Temperature Rating are taken from ASME B16.34 Table 2-1.3 if the maximum pressure is not limited by API 526.

Due to the extended material test certificate the LESER LCB can be applied as LCC, WCB, WCC and 1.0619 with the respective pressure-temperature range as well.

Type 526

Orifice M

Pressure temperature ratings

US units

Valve size		4 M 6	4 M 6	4 M 6	4 M 6	4 M 6
Flange rating class Inlet x Outlet		150 x 150	300L x 150	300 x 150	600 x 150	900 x 150
Actual Orifice diameter d ₀ [inch]		2.37	2.37	2.37	2.37	2.37
Actual Orifice area A ₀ [inch²]		4.43	4.43	4.43	4.43	4.43
Minimum set pressure [psig] S/G/L		3.0	3.0	3.0	3.0	3.0
Minimum set pressure [psig] S/G		37.7	37.7	37.7	91.4	152.3
Balanced bellows Inconel [psig] L		31.9	31.9	31.9	152.3	152.3
Body material: WCB 1.0619						
Pressure range p [psig] S/G/L						
Article numbers		5262.580 ^a	Use 4 M 6 300 x 150	5262.581 ^a	5262.582 ^a	5262.583 ^a
Maximum set pressure	-20 to 100 °F	285		740	1100	1100
	450 °F	185		615	1100	1100
	800 °F	80		410	825	1100
Outlet pressure limit Conventional design		285		285	285	285
Outlet pressure limit Balanced bellows design		80		160	160	160
Body material: CF8M 1.4408						
Pressure range p [psig] S/G/L						
Article numbers		5264.587 ^a	Use 4 M 6 300 x 150	5264.588 ^a	5264.589 ^a	–
Maximum set pressure	-450 to -76 °F	275		525	600	–
	-75 to -21 °F	275		720	1000	–
	-20 to 100 °F	275		720	1000	–
	450 °F	180		495	975	–
	800 °F	80		420	845	–
	1000 °F	20		350	700	–
Outlet pressure limit Conventional design		275		275	275	–
Outlet pressure limit Balanced bellows design		80	160	160	–	
Body material: WC6 1.7357						
Pressure range p [psig] S/G/L						
Article numbers		–	Use 4 M 6 300 x 150	5267.584 ^a	5267.585 ^a	5267.586 ^a
Maximum set pressure	800 °F	–		510	1000	1100
	1000 °F	–		215	430	650
Outlet pressure limit Conventional design		–		285	285	285
Outlet pressure limit Balanced bellows design		–		160	160	160
Body material: LCB						
Pressure range p [psig] S/G/L						
Article numbers		5263.546 ^a	Use 4 M 6 300 x 150	5263.547 ^a	5263.548 ^a	5263.549 ^a
Maximum set pressure	-50 to 100 °F	265		695	1100	1100
	400 °F	200		615	1100	1100
	650 °F	125		535	1065	1100
Outlet pressure limit Conventional design		265		265	265	265
Outlet pressure limit Balanced bellows design		80		160	160	160

^{a)} Please add code for the required cap or lifting device. See page 11.

Remark: SA 352 Gr. LCB is not listed in the API 526. Pressure-Temperature Rating acc. to ASME B16.34 Table 2-1.3
The stated Pressure-Temperature Rating are taken from ASME B16.34 Table 2-1.3 if the maximum pressure is not limited by API 526.

Due to the extended material test certificate the LESER LCB can be applied as LCC, WCB, WCC and 1.0619 with the respective pressure-temperature range as well.

M

Type 526

Orifice N

Pressure temperature ratings

Metric units

Valve size	4 N 6	4 N 6	4 N 6	4 N 6	4 N 6	
Flange rating class Inlet x Outlet	150 x 150	300L x 150	300 x 150	600 x 150	900 x 150	
Actual Orifice diameter d_o [mm]	66.0	66.0	66.0	66.0	66.0	
Actual Orifice area A_o [mm ²]	3421	3421	3421	3421	3421	
Minimum set pressure [bar] S/G/L	0.2	0.2	0.2	0.2	0.2	
Minimum set pressure [bar] S/G	1.8	1.8	1.8	5.2	5.2	
Balanced bellows Inconel [bar] L	1.8	1.8	1.8	8.9	8.9	
Body material: WCB 1.0619						
Pressure range p [bar] S/G/L						
Article numbers	5262.590 [□]	Use 4 N 6 300 x 150	5262.591 [□]	5262.592 [□]	5262.593 [□]	
Maximum set pressure	-29 to 38 °C		19.7	51.0	69.0	69.0
	232 °C		12.8	42.4	69.0	69.0
	427 °C		5.5	28.3	56.9	69.0
Outlet pressure limit						
Conventional design	19.7		19.7	19.7	19.7	
Outlet pressure limit						
Balanced bellows design	5.5		11.0	11.0	11.0	
Body material: CF8M 1.4408						
Pressure range p [bar] S/G/L						
Article numbers	5264.597 [□]	Use 4 N 6 300 x 150	5264.598 [□]	5264.599 [□]	–	
Maximum set pressure	-268 to -60 °C		19.0	31.0	34.5	–
	-59 to -29 °C		19.0	49.7	69.0	–
	-28 to 38 °C		19.0	49.7	69.0	–
	232 °C		12.4	34.1	67.2	–
	427 °C		5.5	29.0	58.3	–
	538 °C		1.4	24.1	48.3	–
Outlet pressure limit						
Conventional design	19.0		19.0	19.0	–	
Outlet pressure limit						
Balanced bellows design	5.5	11.0	11.0	–		
Body material: WC6 1.7357						
Pressure range p [bar] S/G/L						
Article numbers	–	Use 4 N 6 300 x 150	5267.594 [□]	5267.595 [□]	5267.596 [□]	
Maximum set pressure	427 °C		–	35.2	69.0	69.0
	538 °C		–	14.8	29.7	44.8
Outlet pressure limit						
Conventional design	–		19.7	19.7	19.7	
Outlet pressure limit						
Balanced bellows design	–	11.0	11.0	11.0		
Body material: LCB						
Pressure range p [bar] S/G/L						
Article numbers	5263.550 [□]	Use 4 N 6 300 x 150	5263.551 [□]	5263.552 [□]	5263.553 [□]	
Maximum set pressure	-46 to 38 °C		18.4	48.0	69.0	69.0
	200 °C		13.8	42.5	69.0	69.0
	343 °C		8.4	36.4	69.0	69.0
Outlet pressure limit						
Conventional design	18.4		18.4	18.4	18.4	
Outlet pressure limit						
Balanced bellows design	5.5	11.0	11.0	11.0		

□ Please add code for the required cap or lifting device. See page 11.

Remark: SA 352 Gr. LCB is not listed in the API 526. Pressure-Temperature Rating acc. to ASME B16.34 Table 2-1.3

The stated Pressure-Temperature Rating are taken from ASME B16.34 Table 2-1.3 if the maximum pressure is not limited by API 526.

Due to the extended material test certificate the LESER LCB can be applied as LCC, WCB, WCC and 1.0619 with the respective pressure-temperature range as well.

Type 526

Orifice N

Pressure temperature ratings

US units

Valve size		4 N 6	4 N 6	4 N 6	4 N 6	4 N 6
Flange rating class Inlet x Outlet		150 x 150	300L x 150	300 x 150	600 x 150	900 x 150
Actual Orifice diameter d ₀ [inch]		2.60	2.60	2.60	2.60	2.60
Actual Orifice area A ₀ [inch²]		5.30	5.30	5.30	5.30	5.30
Minimum set pressure [psig] S/G/L		3.0	3.0	3.0	3.0	3.0
Minimum set pressure [psig] S/G		26.1	26.1	26.1	75.4	75.4
Balanced bellows Inconel [psig] L		26.1	26.1	26.1	129.0	129.0
Body material: WCB 1.0619						
Pressure range p [psig] S/G/L						
Article numbers		5262.590 ^a	Use 4 N 6 300 x 150	5262.591 ^a	5262.592 ^a	5262.593 ^a
Maximum set pressure	-20 to 100 °F	285		740	1000	1000
	450 °F	185		615	1000	1000
	800 °F	80		410	825	1000
Outlet pressure limit Conventional design		285		285	285	285
Outlet pressure limit Balanced bellows design		80		160	160	160
Body material: CF8M 1.4408						
Pressure range p [psig] S/G/L						
Article numbers		5264.597 ^a	Use 4 N 6 300 x 150	5264.598 ^a	5264.599 ^a	–
Maximum set pressure	-450 to -76 °F	275		450	500	–
	-75 to -21 °F	275		720	1000	–
	-20 to 100 °F	275		720	1000	–
	450 °F	180		495	975	–
	800 °F	80		420	845	–
	1000 °F	20		350	700	–
Outlet pressure limit Conventional design		275		275	275	–
Outlet pressure limit Balanced bellows design		80	160	160	–	
Body material: WC6 1.7357						
Pressure range p [psig] S/G/L						
Article numbers		–	Use 4 N 6 300 x 150	5267.594 ^a	5267.595 ^a	5267.596 ^a
Maximum set pressure	800 °F	–		510	1000	1000
	1000 °F	–		215	430	650
		–		285	285	285
Outlet pressure limit Conventional design		–		285	285	285
Outlet pressure limit Balanced bellows design		–		160	160	160
Body material: LCB						
Pressure range p [psig] S/G/L						
Article numbers		5263.550 ^a	Use 4 N 6 300 x 150	5263.551 ^a	5263.552 ^a	5263.553 ^a
Maximum set pressure	-50 to 100 °F	265		695	1000	1000
	400 °F	200		615	1000	1000
	650 °F	125		535	1000	1000
Outlet pressure limit Conventional design		265		265	265	265
Outlet pressure limit Balanced bellows design		80		160	160	160

^a) Please add code for the required cap or lifting device. See page 11.

Remark: SA 352 Gr. LCB is not listed in the API 526. Pressure-Temperature Rating acc. to ASME B16.34 Table 2-1.3
The stated Pressure-Temperature Rating are taken from ASME B16.34 Table 2-1.3 if the maximum pressure is not limited by API 526.

Due to the extended material test certificate the LESER LCB can be applied as LCC, WCB, WCC and 1.0619 with the respective pressure-temperature range as well.

Type 526

Orifice P

Pressure temperature ratings

Metric units

Valve size	4 P 6	4 P 6	4 P 6	4 P 6	4 P 6
Flange rating class Inlet x Outlet	150 x 150	300L x 150	300 x 150	600 x 150	900 x 150
Actual Orifice diameter d_0 [mm]	80.0	80.0	80.0	80.0	80.0
Actual Orifice area A_0 [mm ²]	5027	5027	5027	5027	5027
Minimum set pressure [bar] S/G/L	0.12	0.12	0.25	0.25	0.25
Minimum set pressure [bar] S/G	2.3	2.3	2.3	2.3	2.3
Balanced bellows Inconel [bar] L	2.5	2.5	2.5	2.5	2.5
Body material: WCB 1.0619					
Pressure range p [bar] S/G/L					
Article numbers	5262.645[□]	5262.646[□]	5262.647[□]	5262.648[□]	5262.649[□]
Maximum set pressure	-29 to 38 °C	19.7	19.7	36.2	69.0
	232 °C	12.8	19.7	36.2	69.0
	427 °C	5.5	19.7	28.3	69.0
Outlet pressure limit Conventional design	19.7	19.7	19.7	19.7	19.7
Outlet pressure limit Balanced bellows design	5.5	5.5	10.3	10.3	10.3
Body material: CF8M 1.4408					
Pressure range p [bar] S/G/L					
Article numbers	5264.653[□]	5264.654[□]	5264.655[□]	5264.656[□]	-
Maximum set pressure	-268 to -60 °C	12.1	12.1	20.7	33.1
	-59 to -29 °C	19.0	19.0	36.2	69.0
	-28 to 38 °C	19.0	19.0	36.2	69.0
	232 °C	12.4	19.0	34.1	67.2
	427 °C	5.5	19.0	29.0	58.3
	538 °C	1.4	19.0	24.1	48.3
Outlet pressure limit Conventional design	19.0	19.0	19.0	19.0	-
Outlet pressure limit Balanced bellows design	5.5	5.5	10.3	10.3	-
Body material: WC6 1.7357					
Pressure range p [bar] S/G/L					
Article numbers	-	-	5267.650[□]	5267.651[□]	5267.652[□]
Maximum set pressure	427 °C	-	35.2	69.0	69.0
	538 °C	-	14.8	29.7	44.8
Outlet pressure limit Conventional design	-	-	19.7	19.7	19.7
Outlet pressure limit Balanced bellows design	-	-	10.3	10.3	10.3
Body material: LCB					
Pressure range p [bar] S/G/L					
Article numbers	5263.554[□]	5263.555[□]	5263.556[□]	5263.557[□]	5263.558[□]
Maximum set pressure	-46 to 38 °C	18.4	18.4	36.2	69.0
	200 °C	13.8	18.4	36.2	69.0
	343 °C	8.4	18.4	36.2	69.0
Outlet pressure limit Conventional design	18.4	18.4	18.4	18.4	18.4
Outlet pressure limit Balanced bellows design	5.5	5.5	10.3	10.3	10.3

[□] Please add code for the required cap or lifting device. See page 11.

Remark: SA 352 Gr. LCB is not listed in the API 526. Pressure-Temperature Rating acc. to ASME B16.34 Table 2-1.3

The stated Pressure-Temperature Rating are taken from ASME B16.34 Table 2-1.3 if the maximum pressure is not limited by API 526.

Due to the extended material test certificate the LESER LCB can be applied as LCC, WCB, WCC and 1.0619 with the respective pressure-temperature range as well.

Type 526

Orifice P

Pressure temperature ratings

US units

Valve size	4 P 6	4 P 6	4 P 6	4 P 6	4 P 6
Flange rating class Inlet x Outlet	150 x 150	300L x 150	300 x 150	600 x 150	900 x 150
Actual Orifice diameter d_o [inch]	3.15	3.15	3.15	3.15	3.15
Actual Orifice area A_o [inch ²]	7.79	7.79	7.79	7.79	7.79
Minimum set pressure [psig] S/G/L	2.0	2.0	4.0	4.0	4.0
Minimum set pressure [psig] S/G	33.4	33.4	33.4	33.4	33.4
Balanced bellows Inconel [psig] L	36.3	36.3	36.3	36.3	36.3
Body material: WCB 1.0619					
Pressure range p [psig] S/G/L					
Article numbers	5262.645[□]	5262.646[□]	5262.647[□]	5262.648[□]	5262.649[□]
Maximum set pressure	-20 to 100 °F	285	285	525	1000
	450 °F	185	285	525	1000
	800 °F	80	285	410	1000
Outlet pressure limit Conventional design	285	285	285	285	285
Outlet pressure limit Balanced bellows design	80	80	150	150	150
Body material: CF8M 1.4408					
Pressure range p [psig] S/G/L					
Article numbers	5264.653[□]	5264.654[□]	5264.655[□]	5264.656[□]	–
Maximum set pressure	-450 to -76 °F	175	175	300	480
	-75 to -21 °F	275	275	525	1000
	-20 to 100 °F	275	275	525	1000
	450 °F	180	275	495	975
	800 °F	80	275	420	845
	1000 °F	20	275	350	700
Outlet pressure limit Conventional design	275	275	275	275	–
Outlet pressure limit Balanced bellows design	80	80	150	150	–
Body material: WC6 1.7357					
Pressure range p [psig] S/G/L					
Article numbers	–	–	5267.650[□]	5267.651[□]	5267.652[□]
Maximum set pressure	800 °F	–	510	1000	1000
	1000 °F	–	215	430	650
Outlet pressure limit Conventional design	–	–	285	285	285
Outlet pressure limit Balanced bellows design	–	–	150	150	150
Body material: LCB					
Pressure range p [psig] S/G/L					
Article numbers	5263.554[□]	5263.555[□]	5263.556[□]	5263.557[□]	5263.558[□]
Maximum set pressure	-50 to 100 °F	265	265	525	1000
	400 °F	200	265	525	1000
	650 °F	125	265	525	1000
Outlet pressure limit Conventional design	265	265	265	265	265
Outlet pressure limit Balanced bellows design	80	80	150	150	150

[□] Please add code for the required cap or lifting device. See page 11.

Remark: SA 352 Gr. LCB is not listed in the API 526. Pressure-Temperature Rating acc. to ASME B16.34 Table 2-1.3
The stated Pressure-Temperature Rating are taken from ASME B16.34 Table 2-1.3 if the maximum pressure is not limited by API 526.

Due to the extended material test certificate the LESER LCB can be applied as LCC, WCB, WCC and 1.0619 with the respective pressure-temperature range as well.

Type 526

Orifice Q

Pressure temperature ratings

Metric units

Valve size	6 Q 8	6 Q 8	6 Q 8	6 Q 8
Flange rating class Inlet x Outlet	150 x 150	300L x 150	300 x 150	600 x 150
Actual Orifice diameter d_0 [mm]	105.5	105.5	105.5	105.5
Actual Orifice area A_0 [mm ²]	8742	8742	8742	8742
Minimum set pressure [bar] S/G/L	0.2	0.2	0.2	0.2
Minimum set pressure [bar] S/G	1.3	1.3	1.3	1.3
Balanced bellows Inconel [bar] L	2.3	2.3	2.3	2.3
Body material: WCB 1.0619		Pressure range p [bar] S/G/L		
Article numbers	5262.657[□]	Use 6 Q 8 300 x 150	5262.658[□]	5262.659[□]
Maximum set pressure	-29 to 38 °C		20.7	41.4 (70)
	232 °C		20.7	41.4 (70)
	427 °C		20.7	41.4 (56.9)
Outlet pressure limit Conventional design	7.9		7.9	7.9
Outlet pressure limit Balanced bellows design	4.8		7.9	7.9
Body material: CF8M 1.4408		Pressure range p [bar] S/G/L		
Article numbers	5264.662[□]	Use 6 Q 8 300 x 150	5264.663[□]	5264.664[□]
Maximum set pressure	-268 to -60 °C		17.2	20.7
	-59 to -29 °C		20.7	41.4
	-28 to 38 °C		20.7	41.4
	232 °C		20.7	41.4
	427 °C		20.7	41.4
	538 °C		20.7	41.4
Outlet pressure limit Conventional design	7.9		7.9	7.9
Outlet pressure limit Balanced bellows design	4.8		7.9	7.9
Body material: WC6 1.7357		Pressure range p [bar] S/G/L		
Article numbers	–	Use 6 Q 8 300 x 150	5267.660[□]	5267.661[□]
Maximum set pressure	427 °C		11.4	41.4 (70)
	538 °C		11.4	29.7 (29.7)
Outlet pressure limit Conventional design	–		7.9	7.9
Outlet pressure limit Balanced bellows design	–		7.9	7.9
Body material: LCB		Pressure range p [bar] S/G/L		
Article numbers	5263.559[□]	Use 6 Q 8 300 x 150	5263.560[□]	5263.561[□]
Maximum set pressure	-46 to 38 °C		20.7	41.4 (70)
	200 °C		20.7	41.4 (70)
	343 °C		20.7	41.4 (70)
Outlet pressure limit Conventional design	7.9		7.9	7.9
Outlet pressure limit Balanced bellows design	4.8		7.9	7.9

[□] Please add code for the required cap or lifting device. See page 11.

() = maximum set pressure of Type 526 high pressure design (Option code Z90)

Remark: SA 352 Gr. LCB is not listed in the API 526. Pressure-Temperature Rating acc. to ASME B16.34 Table 2-1.3

The stated Pressure-Temperature Rating are taken from ASME B16.34 Table 2-1.3 if the maximum pressure is not limited by API 526.

Due to the extended material test certificate the LESER LCB can be applied as LCC, WCB, WCC and 1.0619 with the respective pressure-temperature range as well.

Type 526

Orifice Q

Pressure temperature ratings

US units

Valve size	6 Q 8	6 Q 8	6 Q 8	6 Q 8
Flange rating class Inlet x Outlet	150 x 150	300L x 150	300 x 150	600 x 150
Actual Orifice diameter d_0 [inch]	4.15	4.15	4.15	4.15
Actual Orifice area A_0 [inch ²]	13.55	13.55	13.55	13.55
Minimum set pressure [psig] S/G/L	3.0	3.0	3.0	3.0
Minimum set pressure [psig] S/G	18.8	18.8	18.8	18.8
Balanced bellows Inconel [psig] F	33.4	33.4	33.4	33.4
Body material: WCB 1.0619		Pressure range p [psig] S/G/L		
Article numbers	5262.657^a	Use 6 Q 8 300 x 150	5262.658^a	5262.659^a
Maximum set pressure -20 to 100 °F	165		300	600 (1015)
450 °F	165		300	600 (1015)
800 °F	80		300	600 (825)
Outlet pressure limit Conventional design	115		115	115
Outlet pressure limit Balanced bellows design	70		115	115
Body material: CF8M 1.4408		Pressure range p [psig] S/G/L		
Article numbers	5264.662^a	Use 6 Q 8 300 x 150	5264.663^a	5264.664^a
Maximum set pressure -450 to -76 °F	165		250	300
-75 to -21 °F	165		300	600
-20 to 100 °F	165		300	600
450 °F	165		300	600
800 °F	80		300	600
1000 °F	20		300	600
Outlet pressure limit Conventional design	115		115	115
Outlet pressure limit Balanced bellows design	70		115	115
Body material: WC6 1.7357		Pressure range p [psig] S/G/L		
Article numbers	–	Use 6 Q 8 300 x 150	5267.660^a	5267.661^a
Maximum set pressure 800 °F	–		165	600 (1015)
1000 °F	–		165	430 (430)
Outlet pressure limit Conventional design	–		115	115
Outlet pressure limit Balanced bellows design	–		115	115
Body material: LCB		Pressure range p [psig] S/G/L		
Article numbers	5263.559^a	Use 6 Q 8 300 x 150	5263.560^a	5263.561^a
Maximum set pressure -50 to 100 °F	165		300	600 (1015)
400 °F	165		300	600 (1015)
650 °F	125		300	600 (1015)
Outlet pressure limit Conventional design	115		115	115
Outlet pressure limit Balanced bellows design	70		115	115

^a) Please add code for the required cap or lifting device. See page 11.

() = maximum set pressure of Type 526 high pressure design (Option code Z90)

Remark: SA 352 Gr. LCB is not listed in the API 526. Pressure-Temperature Rating acc. to ASME B16.34 Table 2-1.3
The stated Pressure-Temperature Rating are taken from ASME B16.34 Table 2-1.3 if the maximum pressure is not limited by API 526.

Due to the extended material test certificate the LESER LCB can be applied as LCC, WCB, WCC and 1.0619 with the respective pressure-temperature range as well.

Type 526

Orifice R

Pressure temperature ratings

Metric units

Valve size	6 R 8	6 R 8	6 R 10	6 R 10
Flange rating class Inlet x Outlet	150 x 150	300L x 150	300 x 150	600 x 150
Actual Orifice diameter d_0 [mm]	126.0	126.0	126.0	126.0
Actual Orifice area A_0 [mm ²]	12568	12568	12568	12568
Minimum set pressure [bar] S/G/L	0.2	0.2	0.2	0.2
Minimum set pressure [bar] S/G	1.0	1.0	3.0	3.0
Balanced bellows Inconel [bar] L	1.4	1.4	3.0	3.0
Body material: WCB 1.0619				
Pressure range p [bar] S/G/L				
Article numbers	5262.665[□]	5262.666[□]	5262.667[□]	5262.668[□]
Maximum -29 to 38 °C	6.9	6.9	15.9	20.7 (63)
Set pressure 232 °C	6.9	6.9	15.9	20.7 (63)
427 °C	5.5	6.9	15.9	20.7 (56.7)
Outlet pressure limit Conventional design	4.1	4.1	6.9	6.9
Outlet pressure limit Balanced bellows design	4.1	4.1	6.9	6.9
Body material: CF8M 1.4408				
Pressure range p [bar] S/G/L				
Article numbers	5264.671[□]	5264.672[□]	5264.673[□]	5264.674[□]
Maximum -268 to -60 °C	3.8	3.8	10.3	13.8
Set pressure -59 to -29 °C	6.9	6.9	15.9	20.7
-28 to 38 °C	6.9	6.9	15.9	20.7
232 °C	6.9	6.9	15.9	20.7
427 °C	5.5	6.9	15.9	20.7
538 °C	1.4	6.9	15.9	20.7
Outlet pressure limit Conventional design	4.1	4.1	6.9	6.9
Outlet pressure limit Balanced bellows design	4.1	4.1	6.9	6.9
Body material: WC6 1.7357				
Pressure range p [bar] S/G/L				
Article numbers	–	5267.669[□]	–	5267.670[□]
Maximum 427 °C	–	6.9	–	20.7 (63)
Set pressure 538 °C	–	6.9	–	20.7 (29.7)
Outlet pressure limit Conventional design	–	4.1	–	6.9
Outlet pressure limit Balanced bellows design	–	4.1	–	6.9
Body material: LCB				
Pressure range p [bar] S/G/L				
Article numbers	5263.562[□]	5263.563[□]	5263.564[□]	5263.565[□]
Maximum -46 to 38 °C	6.9	6.9	15.9	20.7 (63)
Set pressure 200 °C	6.9	6.9	15.9	20.7 (63)
343 °C	6.9	6.9	15.9	20.7 (63)
Outlet pressure limit Conventional design	4.1	4.1	6.9	6.9
Outlet pressure limit Balanced bellows design	4.1	4.1	6.9	6.9

[□] Please add code for the required cap or lifting device. See page 11.

() = maximum set pressure of Type 526 high pressure design (Option code Z90)

Remark: SA 352 Gr. LCB is not listed in the API 526. Pressure-Temperature Rating acc. to ASME B16.34 Table 2-1.3
The stated Pressure-Temperature Rating are taken from ASME B16.34 Table 2-1.3 if the maximum pressure is not limited by API 526.

Due to the extended material test certificate the LESER LCB can be applied as LCC, WCB, WCC and 1.0619 with the respective pressure-temperature range as well.

Type 526

Orifice R

Pressure temperature ratings

US units

Valve size	6 R 8	6 R 8	6 R 10	6 R 10
Flange rating class Inlet x Outlet	150 x 150	300L x 150	300 x 150	600 x 150
Actual Orifice diameter d_0 [inch]	4.96	4.96	4.96	4.96
Actual Orifice area A_0 [inch ²]	19.33	19.33	19.33	19.33
Minimum set pressure [psig] S/G/L	3.0	3.0	3.0	3.0
Minimum set pressure [psig] S/G	14.5	14.5	43.5	43.5
Balanced bellows Inconel [psig] L	20.3	20.3	43.5	43.5
Body material: WCB 1.0619				
Pressure range p [psig] S/G/L				
Article numbers	5262.665^{*)}	5262.666^{*)}	5262.667^{*)}	5262.668^{*)}
Maximum Set pressure -20 to 100 °F	100	100	230	300 (913.5)
450 °F	100	100	230	300 (913.5)
800 °F	80	100	230	300 (825)
Outlet pressure limit Conventional design	60	60	100	100
Outlet pressure limit Balanced bellows design	60	60	100	100
Body material: CF8M 1.4408				
Pressure range p [psig] S/G/L				
Article numbers	5264.671^{*)}	5264.672^{*)}	5264.673^{*)}	5264.674^{*)}
Maximum Set pressure -450 to -76 °F	55	55	150	200
-75 to -21 °F	100	100	230	300
-20 to 100 °F	100	100	230	300
450 °F	100	100	230	300
800 °F	80	100	230	300
1000 °F	20	100	230	300
Outlet pressure limit Conventional design	60	60	100	100
Outlet pressure limit Balanced bellows design	60	60	100	100
Body material: WC6 1.7357				
Pressure range p [psig] S/G/L				
Article numbers	–	5267.669^{*)}	–	5267.670^{*)}
Maximum Set pressure 800 °F	–	100	–	300 (913.5)
1000 °F	–	100	–	300 (430)
Outlet pressure limit Conventional design	–	60	–	100
Outlet pressure limit Balanced bellows design	–	60	–	100
Body material: LCB				
Pressure range p [psig] S/G/L				
Article numbers	5263.562^{*)}	5263.563^{*)}	5263.564^{*)}	5263.565^{*)}
Maximum Set pressure -50 to 100 °F	100	100	230	300 (913.5)
400 °F	100	100	230	300 (913.5)
650 °F	100	100	230	300 (913.5)
Outlet pressure limit Conventional design	60	60	100	100
Outlet pressure limit Balanced bellows design	60	60	100	100

^{*)} Please add code for the required cap or lifting device. See page 11.

() = maximum set pressure of Type 526 high pressure design (Option code Z90)

Remark: SA 352 Gr. LCB is not listed in the API 526. Pressure-Temperature Rating acc. to ASME B16.34 Table 2-1.3
The stated Pressure-Temperature Rating are taken from ASME B16.34 Table 2-1.3 if the maximum pressure is not limited by API 526.

Due to the extended material test certificate the LESER LCB can be applied as LCC, WCB, WCC and 1.0619 with the respective pressure-temperature range as well.

Type 526

Orifice T

Pressure temperature ratings

Metric units

Valve size	8 T 10	8 T 10	8 T 10
Flange rating class Inlet x Outlet	150 x 150	300L x 150	300 x 150
Actual Orifice diameter d_0 [mm]	161.5	161.5	161.5
Actual Orifice area A_0 [mm ²]	20485	20485	20485
Minimum set pressure [bar] S/G/L	0.25	0.25	0.25
Minimum set pressure [bar] S/G	1.2	1.2	1.2
Balanced bellows Inconel [bar] L	2.5	2.5	2.5
Body material: WCB 1.0619		Pressure range p [bar] S/G/L	
Article numbers	5262.675[□]	Use 8 T 10 300 x 150	5262.676[□]
Maximum set pressure -29 to 38 °C	4.5		20.7 (36)
232 °C	4.5		20.7 (36)
427 °C	4.5		20.7 (28.3)
Outlet pressure limit Conventional design	2.1		6.9
Outlet pressure limit Balanced bellows design	2.1		6.9
Body material: CF8M 1.4408		Pressure range p [bar] S/G/L	
Article numbers	5264.678[□]	Use 8 T 10 300 x 150	5264.679[□]
Maximum set pressure -268 to -60 °C	3.4		4.5
-59 to -29 °C	4.5		8.3
-28 to 38 °C	4.5		8.3
232 °C	4.5		8.3
427 °C	4.5		8.3
538 °C	1.4		8.3
Outlet pressure limit Conventional design	2.1		4.1
Outlet pressure limit Balanced bellows design	2.1		4.1
Body material: WC6 1.7357		Pressure range p [bar] S/G/L	
Article numbers	–	Use 8 T 10 300 x 150	5267.677[□]
Maximum Set pressure 427 °C	–		20.7 (35.2)
538 °C	–		15.5 (15.5)
Outlet pressure limit Conventional design	–		6.9
Outlet pressure limit Balanced bellows design	–		6.9
Body material: LCB		Pressure range p [bar] S/G/L	
Article numbers	5263.566[□]	Use 8 T 10 300 x 150	5263.567[□]
Maximum set pressure -46 to 38 °C	4.5		20.7 (36)
200 °C	4.5		20.7 (36)
343 °C	4.5		20.7 (36)
Outlet pressure limit Conventional design	2.1		6.9
Outlet pressure limit Balanced bellows design	2.1		6.9

[□] Please add code for the required cap or lifting device. See page 11.

() = maximum set pressure of Type 526 high pressure design (Option code Z90)

Remark: SA 352 Gr. LCB is not listed in the API 526. Pressure-Temperature Rating acc. to ASME B16.34 Table 2-1.3
The stated Pressure-Temperature Rating are taken from ASME B16.34 Table 2-1.3 if the maximum pressure is not limited by API 526.

Due to the extended material test certificate the LESER LCB can be applied as LCC, WCB, WCC and 1.0619 with the respective pressure-temperature range as well.

Type 526

Orifice T

Pressure temperature ratings

US units

Valve size	8 T 10	8 T 10	8 T 10
Flange rating class Inlet x Outlet	150 x 150	300L x 150	300 x 150
Actual Orifice diameter d_o [inch]	6.36	6.36	6.36
Actual Orifice area A_o [inch ²]	31.75	31.75	31.75
Minimum set pressure [psig] S/G/L	4.0	4.0	4.0
Minimum set pressure [psig] S/G	17.4	17.4	17.4
Balanced bellows Inconel [psig] L	36.3	36.3	36.3
Body material: WCB 1.0619		Pressure range p [psig] S/G/L	
Article numbers	5262.675^a	Use 8 T 10 300 x 150	5262.676^a
Maximum set pressure -20 to 100 °F	65		300 (522)
450 °F	65		300 (522)
800 °F	65		300 (410)
Outlet pressure limit Conventional design	30		100
Outlet pressure limit Balanced bellows design	30		100
Body material: CF8M 1.4408		Pressure range p [psig] S/G/L	
Article numbers	5264.678^a	Use 8 T 10 300 x 150	5264.679^a
Maximum set pressure -450 to -76 °F	50		65
-75 to -21 °F	65		120
-20 to 100 °F	65		120
450 °F	65		120
800 °F	65		120
1000 °F	20		120
Outlet pressure limit Conventional design	30		60
Outlet pressure limit Balanced bellows design	30		60
Body material: WC6 1.7357		Pressure range p [psig] S/G/L	
Article numbers	–	Use 8 T 10 300 x 150	5267.677^a
Maximum set pressure 800 °F	–		300 (510)
1000 °F	–		225 (225)
Outlet pressure limit Conventional design	–		100
Outlet pressure limit Balanced bellows design	–		100
Body material: LCB		Pressure range p [psig] S/G/L	
Article numbers	5263.566^a	Use 8 T 10 300 x 150	5263.567^a
Maximum set pressure -50 to 100 °F	65		300 (522)
400 °F	65		300 (522)
650 °F	65		300 (522)
Outlet pressure limit Conventional design	30		100
Outlet pressure limit Balanced bellows design	30		100

^a Please add code for the required cap or lifting device. See page 11.

() = maximum set pressure of Type 526 high pressure design (Option code Z90)

Remark: SA 352 Gr. LCB is not listed in the API 526. Pressure-Temperature Rating acc. to ASME B16.34 Table 2-1.3
The stated Pressure-Temperature Rating are taken from ASME B16.34 Table 2-1.3 if the maximum pressure is not limited by API 526.

Due to the extended material test certificate the LESER LCB can be applied as LCC, WCB, WCC and 1.0619 with the respective pressure-temperature range as well.

Type 526

Available options

Type 526

Screwed cap H2
H2




Packed lever H4
H4




Plain lever H3
H3




Open bonnet
See Art. No.

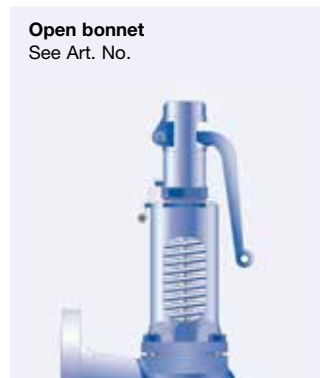


Test gag
J69: H4
J70: H2
K05: H1
K27: H6

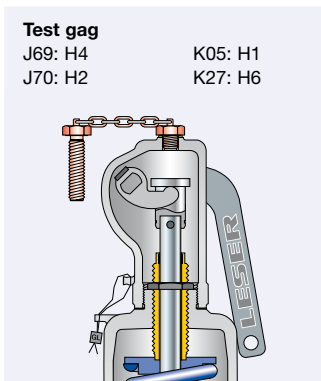


Lift indicator
J39: Adaptor for lift indicator H4
J93: Lift indicator

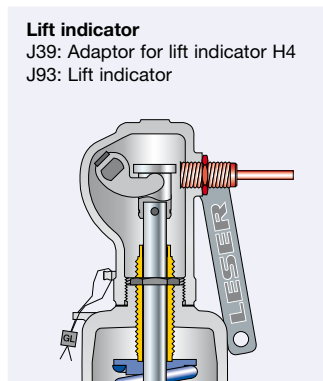


Bolted cap H1
K01

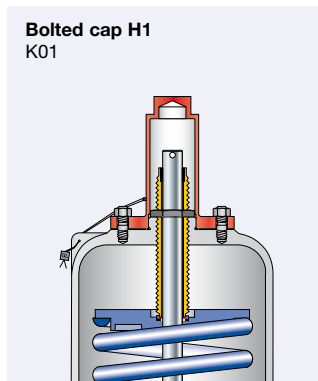


Bolted lifting device H6
K06

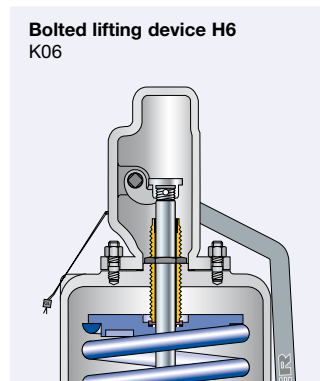


Flange drillings
acc. to DIN EN 1092-1

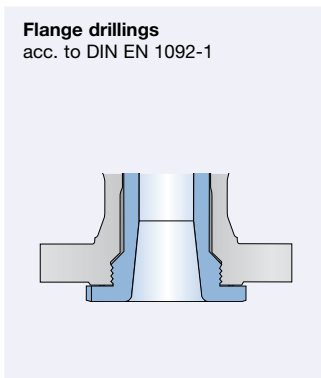


Outlet flange rating class 300

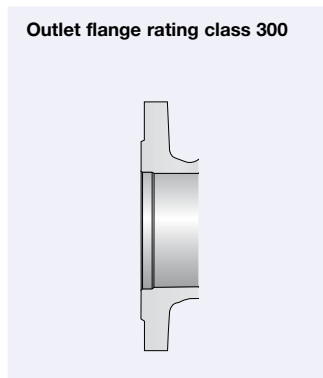


O-ring disc
J21: CR "K"
J22: EPDM "D"
J23: FKM "L"
J20: FFKM "C"

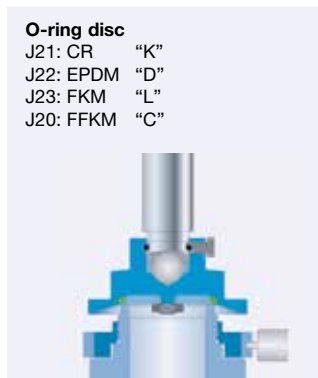


Disc with inserted sealing plate
J44+S07: PTFE-FDA "A"
J48+S07: PCTFE "G"
J49+S07: SP "T"

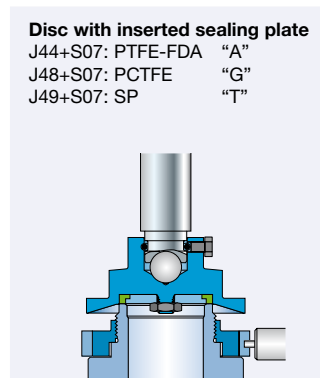


Inconel bellows
J83

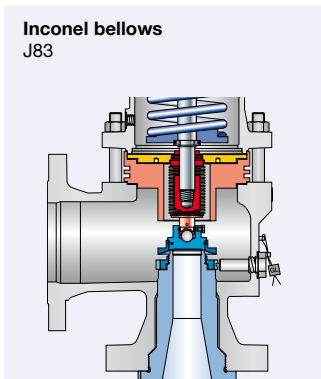


Bug screen
M70

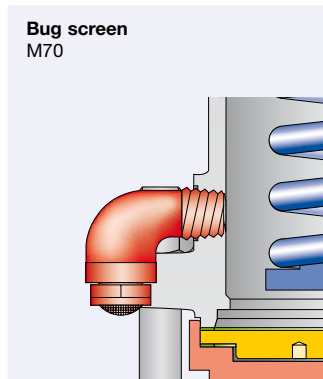

Conversion kit for balanced bellows

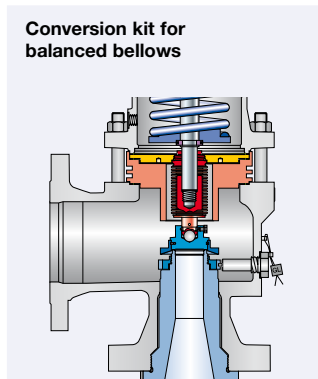

High temperature equipment
J88

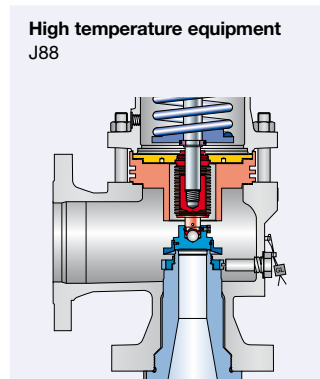

Type 526

Available options

NACE sour gas application
N78



INCONEL X-750 spring
X08



API Alloy Concept



High pressure design
for orifices Q, R, T
Z90

Butt-weld connection
S05



Heating jacket



LESER Original Spare Parts Kits
see page 54



UREA Synthesis section
safety valve



Type 526

Flange drillings according to DIN EN 1092-1

Type 526

Standard API 526		Article number					Flange drillings															
Valve size	Flange class	Material				Inlet	Inlet										Outlet	Outlet				
		WCB	LCB	WC6	CF8M		PN	PN	PN	PN	PN	PN	PN	PN	PN	PN		PN				
		5262.	5263.	5267.	5264.	[DN]	10/16	25	40	63	100	160	250	320	400	[DN]	10	16	25	40	63	
1 D 2	300 x 150 ¹⁾	002*	501*	006*	011*	25	H47	H47	H47	–	–	–	–	–	–	50	H15	H15	H15	H15	–	
1 D 2	600 x 150	003*	502*	007*	012*	25	–	–	–	H10	H17	–	–	–	–	50	H15	H15	H15	H15	–	
1½ D 2	1500 x 300	004*	503*	008*	013*	40	–	–	–	–	–	H11	H12	–	–	50	H15	H15	H15	H15	–	
1½ D 3	2500 x 300	005*	504*	009*	014*	40	–	–	–	–	–	–	H12	H13	–	80	H15	H15	H15	H15	H16	
1 E 2	300 x 150 ¹⁾	016*	506*	020*	025*	25	H47	H47	H47	–	–	–	–	–	–	50	H15	H15	H15	H15	–	
1 E 2	600 x 150	017*	507*	021*	026*	25	–	–	–	H10	H17	–	–	–	–	50	H15	H15	H15	H15	–	
1½ E 2	1500 x 300	018*	508*	022*	027*	40	–	–	–	–	–	H11	H12	–	–	50	H15	H15	H15	H15	–	
1½ E 3	2500 x 300	019*	509*	023*	028*	40	–	–	–	–	–	–	H12	H13	–	80	H15	H15	H15	H15	H16	
1½ F 2	300L x 150	030*	511*	–	040*	40	H47	–	–	–	–	–	–	–	–	50	H15	H15	H15	H15	–	
1½ F 2	300 x 150	031*	512*	035*	041*	40	–	H47	H47	–	–	–	–	–	–	50	H15	H15	H15	H15	–	
1½ F 2	600 x 150	032*	513*	036*	042*	40	–	H47	H47	–	–	–	–	–	–	50	H15	H15	H15	H15	–	
1½ F 3	1500 x 300	033*	514*	037*	043*	40	–	–	–	H10	H17	H11	H12	–	–	80	H15	H15	H15	H15	H16	
1½ F 3	2500 x 300	034*	515*	038*	044*	40	–	–	–	–	–	–	H12	H13	–	80	H15	H15	H15	H15	H16	
1½ G 3	300L x 150	046*	517*	–	111*	40	H47	–	–	–	–	–	–	–	–	80	H15	H15	H15	H15	–	
1½ G 3	300 x 150	047*	518*	052*	112*	40	–	H47	H47	H10	–	–	–	–	–	80	H15	H15	H15	H15	–	
1½ G 3	600 x 150	048*	519*	053*	113*	40	–	–	–	H10	H17	H11	–	–	–	80	H15	H15	H15	H15	–	
1½ G 3	900 x 300	049*	520*	054*	114*	40	–	–	–	–	H17	H11	–	–	–	80	H15	H15	H15	H15	H16	
2 G 3	1500 x 300	050*	521*	055*	115*	50	–	–	–	–	–	–	H12	H13	–	80	H15	H15	H15	H15	H16	
2 G 3	2500 x 300	051*	522*	056*	116*	50	–	–	–	–	–	–	–	–	H14	80	H15	H15	H15	H15	H16	
1½ H 3	300L x 150	143*	524*	–	153*	40	H47	H47	H47	–	–	–	–	–	–	80	H15	H15	H15	H15	–	
2 H 3	300 x 150	144*	525*	148*	154*	50	–	–	H47	H10	–	–	–	–	–	80	H15	H15	H15	H15	–	
2 H 3	600 x 150	–	–	149*	–	50	–	–	H47	H10	–	–	–	–	–	80	H15	H15	H15	H15		
2 H 3	600 x 150	145*	526*	–	155*	50	–	–	H47	H10	–	–	–	–	–	80	H15	H15	H15	H15	H16	
2 H 3	900 x 150	146*	527*	150*	156*	50	–	–	–	–	H17	H11	–	–	–	80	H15	H15	H15	H15	H16	
2 H 3	1500 x 300	147*	528*	151*	157*	50	–	–	–	–	–	H11	H12	–	–	80	H15	H15	H15	H15	H16	
2 J 3	300L x 150	163*	530*	–	197*	50	H47	H47	H47	H10	–	–	–	–	–	80	H15	H15	H15	H15	–	
3 J 4	600 x 150	165*	532*	169*	199 *	80	–	–	H47	H10	–	–	–	–	–	100	H51	H51	H51	H51	–	
3 J 4	900 x 150	166*	533*	170*	200*	80	–	–	–	–	H17	H11	–	–	–	100	H51	H51	H15	H15	H16	
3 J 4	1500 x 300	167*	534*	171*	201*	80	–	–	–	–	–	H11	H12	–	–	100	H51	H51	H15	H15	H16	

¹⁾ 300L x 150 is available with the same Article-No.

Note: Flange drillings and facings meet always the requirements of mentioned flange standards. Flange thickness and outer diameter may be thicker and wider than flange standard. For correct selection of bolting please refer to LDeS 3007.01. The inlet pressure size CL150 is not considered, please switch to inlet pressure size CL300 or CL300L.

Type 526

Flange drillings according to DIN EN 1092-1

Standard API 526		Article number					Flange drillings															
Valve size	Flange class	Material				Inlet	Inlet										Outlet	Outlet				
		WCB	LCB	WC6	CF8M	NPS	PN	PN	PN	PN	PN	PN	PN	PN	PN	NPS	PN	PN	PN	PN	PN	
		5262.	5263.	5267.	5264.	[DN]	10/16	25	40	63	100	160	250	320	400	[DN]	10	16	25	40	63	
3 K 4	300 x 150 ¹⁾	203*	536*	207*	212*	80	H47	H47	H47	H10	-	-	-	-	-	100	H51	H51	H15	H15	-	
3 K 4	600 x 150	204*	537*	208*	213*	80	-	-	H47	H10	-	-	-	-	-	100	H51	H51	H15	H15	-	
3 K 6	900 x 150	-	-	209*	-	80	-	-	-	H10	H17	H11	H12	-	-	150	H51	H51	-	-	-	
3 K 6	900 x 150	205*	538*	-	214*	80	-	-	-	H10	H17	H11	H12	-	-	150	H51	H51	H15	H15	-	
3 K 6	1500 x 300	206*	539*	210*	215*	80	-	-	-	H10	H17	H11	H12	-	-	150	H51	H51	H15	H15	-	
3 L 4	300L x 150	233*	541*	-	243*	80	H47	H47	H47	H10	-	-	-	-	-	100	H15	H15	H15	H15	-	
4 L 6	300 x 150	234*	542*	238*	244*	100	H45	H47	H47	H10	-	-	-	-	-	150	H51	H51	-	-	-	
4 L 6	600 x 150	235*	543*	239*	245*	100	-	-	-	H10	H17	H11	-	-	-	150	H51	H51	-	-	-	
4 L 6	900 x 150	236*	544*	240*	246*	100	-	-	-	-	H17	H11	-	-	-	150	H51	H51	-	-	-	
4 L 6	1500 x 300	237*	545*	241*	-	100	-	-	-	-	-	-	H12	-	-	150	H51	H51	-	-	-	
4 M 6	300 x 150 ¹⁾	581*	547*	584*	588*	100	H45	H47	H47	H10	-	-	-	-	-	150	H51	H51	-	-	-	
4 M 6	600 x 150	582*	548*	585*	589*	100	-	-	-	H10	H17	H11	-	-	-	150	H51	H51	-	-	-	
4 M 6	900 x 150	583*	549*	586*	-	100	-	-	-	-	H17	H11	-	-	-	150	H51	H51	-	-	-	
4 N 6	300L x 150 ¹⁾	591*	551*	594*	598*	100	H45	H47	H47	H10	-	-	-	-	-	150	H51	H51	-	-	-	
4 N 6	600 x 150	592*	552*	595*	599*	100	-	-	-	-	H17	H11	-	-	-	150	H51	H51	-	-	-	
4 N 6	900 x 150	593*	553*	596*	-	100	-	-	-	-	-	-	-	-	-	150	H51	H51	-	-	-	
4 P 6	300L x 150	646*	555*	-	654*	100	H45	H47	H47	-	-	-	-	-	-	150	H51	H51	-	-	-	
4 P 6	300 x 150	647*	556*	550*	655*	100	-	H47	H47	-	-	-	-	-	-	150	H51	H51	-	-	-	
4 P 6	600 x 300	648*	557*	551*	656*	100	-	-	-	H10	H17	-	-	-	-	150	H51	H51	-	-	-	
4 P 6	900 x 300	649*	558*	552*	-	100	-	-	-	-	-	H11	-	-	-	150	H51	H51	-	-	-	
6 Q 8	300 x 150	658*	560*	660*	663*	150	H45	H47	H47	-	-	-	-	-	-	200	H50	H51	H52	-	-	
6 Q 8	600 x 150	659*	561*	661*	664*	150	-	-	-	H10	H17	-	-	-	-	200	H50	H51	H52	-	-	
6 R 8	300L x 150	666*	563*	669*	672*	150	H45	H47	H47	H10	-	-	-	-	-	200	H50	H51	H52	-	-	
6 R 10	300 x 150	667*	564*	-	673*	150	-	-	H47	H10	-	-	-	-	-	250	H50	H51	-	-	-	
6 R 10	600 x 150	668*	565*	670*	674*	150	-	-	H47	H10	H17	-	-	-	-	250	H50	H51	-	-	-	
8 T 10	300 x 150 ¹⁾	676*	567*	677*	679*	200	-	H46	H47	-	-	-	-	-	-	250	H50	H51	-	-	-	

¹⁾ 300L x 150 is available with the same Article-No.

Note: Flange drillings and facings meet always the requirements of mentioned flange standards. Flange thickness and outer diameter may be thicker and wider than flange standard. For correct selection of bolting please refer to LDeS 3007.01. The inlet pressure size CL150 is not considered, please switch to inlet pressure size CL300 or CL300L.

Type 526

Outlet flange rating class 300

For customer specifications requiring a flange rating class 300 at the outlet LESER provides Type 526 with outlet flange rating class 300. For ordering please state the article numbers and option codes which are listed in the table.

Orifice	Valve size Inlet x Outlet	Body material	300 x 300		600 x 300	
	Center to face a x b		Art. No.	Option code	Art. No.	Option code
D	1" x 2"	WCB 1.0619	5262.002X	H65, H80, S01	5262.003X	H65, H80, S01
		CF8M 1.4408	5264.011X	H65, H80, S01	5264.012X	H65, H80, S01
	4 1/8" x 4 1/2"	WC6 1.7357	5267.006X	H65, H80, S01	5267.007X	H65, H80, S01
		LCB	5263.501X	H65, H80, S01	5263.502X	H65, H80, S01
D	1 1/2" x 2"	WCB 1.0619	5262.004X	H65, H80	5262.004X	H67, H80
		CF8M 1.4408	5264.013X	H65, H80	5264.013X	H67, H80
	4 1/8" x 5 1/2"	WC6 1.7357	5267.008X	H65, H80	5267.008X	H67, H80
		LCB	5263.503X	H65, H80	5263.503X	H67, H80
E	1" x 2"	WCB 1.0619	5262.016X	H65, H80, S01	5262.017X	H65, H80, S01
		CF8M 1.4408	5264.025X	H65, H80, S01	5264.026X	H65, H80, S01
	4 1/8" x 4 1/2"	WC6 1.7357	5267.020X	H65, H80, S01	5267.021X	H65, H80, S01
		LCB	5263.506X	H65, H80, S01	5263.507X	H65, H80, S01
E	1 1/2" x 2"	WCB 1.0619	5262.018X	H65, H80	5262.018X	H67, H80
		CF8M 1.4408	5264.027X	H65, H80	5264.027X	H67, H80
	4 1/8" x 5 1/2"	WC6 1.7357	5267.022X	H65, H80	5267.022X	H67, H80
		LCB	5263.508X	H65, H80	5263.508X	H67, H80
F	1 1/2" x 2"	WCB 1.0619	5262.031X	H65, H80	5262.032X	H67, H80
		CF8M 1.4408	5264.041X	H65, H80	5264.041X	H67, H80
	4 7/8" x 6"	WC6 1.7357	5267.035X	H65, H80	5267.036X	H67, H80
		LCB	5263.512X	H65, H80	5263.512X	H67, H80
G	1 1/2" x 3"	WCB 1.0619	5262.049X	H65, H80	5262.049X	H67, H80
		CF8M 1.4408	5264.114X	H65, H80	5264.114X	H67, H80
	4 7/8" x 6 1/2"	WC6 1.7357	5267.054X	H65, H80	5267.054X	H67, H80
		LCB	5263.520X	H65, H80	5263.520X	H67, H80
H	2" x 3"	WCB 1.0619	5262.146X	H65, H80	5262.146X	H67, H80
		CF8M 1.4408	5264.156X	H65, H80	5264.156X	H67, H80
	6 1/16" x 6 3/8"	WC6 1.7357	5267.150X	H65, H80	5267.150X	H67, H80
		LCB	5263.527X	H65, H80	5263.527X	H67, H80
J	3" x 4"	WCB 1.0619	5262.166X	H65, H80	5262.166X	H67, H80
		CF8M 1.4408	5264.200X	H65, H80	5264.200X	H67, H80
	7 1/4" x 7 1/8"	WC6 1.7357	5267.170X	H65, H80	5267.170X	H67, H80
		LCB	5263.533X	H65, H80	5263.533X	H67, H80

Grey marked safety valves: The center to face dimensions are equal to API standard 526 with outlet flange rating class 150.


Type 526

Outlet flange rating class 300

Orifice	Valve size Inlet x Outlet	Body material	300 x 300		600 x 300	
	Center to face a x b		Art. No.	Option code	Art. No.	Option code
K	3" x 4"	WCB 1.0619	5262.204X	H65, H80	5262.204X	H67, H80
		CF8M 1.4408	5264.213X	H65, H80	5264.213X	H67, H80
	7 1/4" x 7 1/8"	WC6 1.7357	5267.208X	H65, H80	5267.209X	H67, H80
		LCB	5263.537X	H65, H80	5263.537X	H67, H80
L	4" x 6"	WCB 1.0619	5262.235X	H65, H80	5262.235X	H67, H80
		CF8M 1.4408	5264.245X	H65, H80	5264.245X	H67, H80
	7 3/4" x 8 1/2"	WC6 1.7357	5267.239X	H65, H80	5267.239X	H67, H80
		LCB	5263.543X	H65, H80	5263.543X	H67, H80
M	4" x 6"	WCB 1.0619	5262.582X	H65, H80	5262.582X	H67, H80
		CF8M 1.4408	5264.589X	H65, H80	5264.589X	H67, H80
	7 3/4" x 8 1/2"	WC6 1.7357	5267.585X	H65, H80	5267.585X	H67, H80
		LCB	5263.548X	H65, H80	5263.548X	H67, H80
N	4" x 6"	WCB 1.0619	5262.592X	H65, H80	5262.592X	H67, H80
		CF8M 1.4408	5264.599X	H65, H80	5264.599X	H67, H80
	7 3/4" x 8 1/2"	WC6 1.7357	5267.595X	H65, H80	5267.595X	H67, H80
		LCB	5263.552X	H65, H80	5263.552X	H67, H80
P	4" x 6" Welded outlet flange	WCB 1.0619	5262.647X	S01	5262.648X	S01
		CF8M 1.4408	5264.655X	S01	5262.656X	S01
	8 7/8" x 11 5/8"	WC6 1.7357	5267.650X	S01	5262.651X	S01
		LCB	5263.556X	S01	5262.557X	S01
Q	6" x 8" Welded outlet flange	WCB 1.0619	5262.658X	S01	5262.658X	S01
		CF8M 1.4408	5264.663X	S01	5264.663X	S01
	9 7/16" x 12"	WC6 1.7357	5267.660X	S01	5267.660X	S01
		LCB	5263.560X	S01	5263.560X	S01
R	6" x 10" Welded outlet flange	WCB 1.0619	5262.667X	S01	5262.667X	S01
		CF8M 1.4408	5264.673X	S01	5264.673X	S01
	9 7/16" x 13 1/5"	WC6 1.7357	5267.670X	S01	5267.670X	S01
		LCB	5263.564X	S01	5263.564X	S01
T	8" x 10" Welded outlet flange	WCB 1.0619	5262.676X	S01		
		CF8M 1.4408	5264.679X	S01		
	10 7/8" x 13 1/5"	WC6 1.7357	5267.677X	S01		
		LCB	5263.567X	S01		

Type 526

Outlet flange rating class 300

Orifice	900 x 300		1500 x 300		2500 x 300				
	Art. No.	Option code	Art. No.	Option code	Art. No.	Option code			
D	Outlet flange rating class 300 is standard flange rating class acc. to API standard 526								
D									
E									
E									
F									
G									
H	5262.147X	Class 1500 x 300							
	5264.157X								
	5267.151X								
	5263.528X								
J	5262.166X	H68, H80							
	5264.200X	H68, H80							
	5267.170X	H68, H80							
	5263.533X	H68, H80							
K	5262.204X	H68, H80							
	5264.213X	H68, H80							
	5267.209X	H68, H80							
	5263.537X	H68, H80							
L	Welded outlet flange rating class 300 available on request.								
M									
N									
P									
Q									
R	Design details Orifice D and E: 1 D 2 and 1 E 2 class 300 x 300 and 600 x 300 are realised by a modification of Type 458 DN 25 / 1". Orifice L: 4 L 6 class 900 x 300 and 1500 x 300 can be realised by a welded outlet flange on request. Orifice M – P: 4 M 6, 4 N 6 and 4 P 6 class 900 x 300 can be realised by a welded outlet flange on request. Orifice P – T: 4 P 6 up to 8 T 10 are realised by a welded outlet flange class 300. Center to face: The center to face dimensions a and b for LESER Type 526 with outlet flange rating class 300 are not specified in API Standard 526. The actual dimensions are listed in the table. They differ from the dimensions which are specified in API 526 for safety valves with outlet flange class 150. Exceptions see page 50.								
T									

Type 526

Flange facings

Acc. to DIN EN 1092						
		Inlet		Outlet		Remark
Flange facing (see also WI 3313.40)		PN 10 – PN 40	PN 63 – PN 400	PN 10 – PN 40	PN 63	Rz-data according to DIN EN 1092 in µm
Raised face	Type B1	*	–	*	–	Facing: Rz = 12.5 – 50
	Type B2	L36	*	L38	*	Facing: Rz = 3.2 – 12.5
Tongue face C ¹⁾		S05		H92		
Groove face D ¹⁾		S05		H91		
Male face E		S05		H98		
Female face F		S05		H99		
O-ring male face G		S05		S01		
O-ring female face H		S05		S01		

Acc. to ASME B16.5													
Body material	Inlet	Outlet	Smooth finish ²⁾		Serrated finish		RTJ-Groove						
			Inlet	Outlet	Inlet	Outlet	Inlet					Outlet	
			Option code	Option code	Option code	Option code	CL300	CL600	CL900	CL1500	CL2500	CL150	CL300
All	All	All	L52	L53	*	*	L58					H63	

¹⁾ LESER manufactures the groove at flanged valves by milling. If a customer demands a turned surface in the soil of the groove according to DIN 2512 and / or DIN EN 1092-1 an additional option code is necessary: "S01: bottom of the groove drilled".

²⁾ Smooth finish is not defined in the effective standards.

Note: Flange drillings and facings meet always the requirements of mentioned flange standards.
Flange thickness and outer diameter may vary from flange standard.

Stud-bolts length for flange connection inlet and outlet

All LESER safety valves Type 526 need at the inlet side longer stud-bolts for the flange connections as stated in ASME B16.5, due to the full nozzle design. Furthermore, due to the actual castings the stud bolts at the outlet can differ from ASME B16.5 as well.
LESER state the stud-bolt length in LDeS 3001.29. For calculation of stud-bolts length the measure "s" stated on page 12 – 15 can be used.

Connection acc. to API Standard 526 – 1984				
Orifice	Valve size		Flange rating class	Option code
	Inlet	Outlet	Inlet	
D / E	1 1/2"	3", drilled 2 1/2"	CL2500	S01
F	1 1/2"	3", drilled 2 1/2"	CL900	S01
G	1 1/2"	3", drilled 2 1/2"	CL150 – 900	S01
J	2 1/2"	4"	CL900 – 1500	S01
K	2 1/2"	6"	CL900 – 1500	S01

General information concerning flange drillings and flange facings	
Dimensions	Flange dimensions of LESER Type 526 exceed flange dimension as mentioned in ASME / ANSI B16.5 and DIN EN 1092. This exceedance is in accordance with API Standard 526, Section 2.4. Dimensions: "For some valve designs, the inlet raised face height may substantially exceed the nominal dimension specified in ASME / ANSI B16.5 (and DIN EN 1092). Consult the manufacturer for exact dimension." The reason for this exceedance is: – height of nozzle placed in the inlet of valve – due to the outer diameter of the nozzle thread flange thickness has to be thicker than normal ASME / ANSI B16.5 and DIN EN 1092 dimension to achieve the required pressure rating
Multiple pressure rating	The flange standard shows the same drilling, facing and outer diameter for several pressure ratings, e.g. PN 16 up to PN 40. Due to the pressure rating of the casting LESER fulfills the requirements for flange thickness e.g. of PN 16 but not PN 40.
Smooth Finish	The effective MSS SP-6 (Edition 2001) does not mention "smooth finish" anymore. In MSS SP-6 (Edition 1980) "smooth finish" is defined for finishes of contact flanges as "250 µinch (6.3 µm) AARH max.". LESER supplies flange facings according to ASME B16.5 – 1996, paragraph 6.4.4.3: "Either a serrated concentric or serrated spiral finish resulting in service finish from 125 µinch to 250 µinch average roughness shall be furnished." This finish meets the requirements of MSS SP-6 (Edition 1980), which is not valid anymore!
Stock Finish	Stock finish is not defined in any technical standard. If purchase orders show "stock finish" LESER supplies standard facing according to DIN or ASME (marked with * in table "Flange facings" of each valve series).

Type 526

LESER Original Spare Parts Kits

The LESER Spare Parts Kits contain all the parts recommended for the regular maintenance of a LESER safety valve.



Content

Item	Component	Material	Quantity
7.5	Securing ring (Disc)	1.4571	1
		316Ti	
14	Split ring	1.4404	2
		316L	
57	Ball	1.4401	15
		316	
59	Securing ring ¹⁾	1.4571	1
		316Ti	
60	Gasket ²⁾	Graphite / 1.4401	3
		Graphite / 316	
61	Ball	1.4401	1
		316	
66	Screw	1.4401	1
		316	
73.2	Gasket (Lock screw)	1.4401	1
		316	

¹⁾ Kits 5012.1118 and 5012.1119: Kits don't contain securing ring due to re-usable ring bush in the safety valve.

²⁾ Kit 5012.1109: Three additional gaskets are enclosed for use in type 5267 (WC6).

Article numbers

Orifice	Inlet flange rating class of the safety valve							
	CL150	CL300L	CL300	CL600	CL900	CL1500	CL2500	
D	5012.1101				5012.1102			
E								
F	5012.1103							
G	5012.1104					5012.1121		
H	5012.1105		5012.1106					
J	5012.1107		5012.1108					
K	5012.1109				5012.1110			
L	5012.1111		5012.1112					
M	5012.1113							
N	5012.1114							
P	5012.1115		5012.1116					
Q	5012.1117							
R	5012.1118		5012.1119					
T	5012.1120							

Type 526

Approvals

Orifice		D	E – T
Europe		Coefficient of discharge K_{dr}	
PED/DIN EN ISO 4126-1 12/2013	Approval No.	07 202 1111Z0012/2/26	
	S/G	0.45	0.80
	L	0.32	0.58
Germany		Coefficient of discharge α_w	
PED/AD 2000-Merkblatt A2 07/2012	Approval No.	TÜV SV 1082	
	S/G	0.45	0.80
	L	0.32	0.58
United States		Coefficient of discharge K	
ASME Sec. VIII Div. 1	Approval No.	M37246	M37224
	S/G	Rated slope acc. to ASME VIII. Div. 1 UG-131 (d) (2)	0.801
		G: 1.99 SCFM/psia	
		S: 5.59 lb/hr/psia	
	Approval No.	M37257	M37235
	L	Rated slope acc. to ASME VIII. Div. 1 UG-131 (d) (2)	0.579
		3.11 GPM/ $\sqrt{\text{psid}}$	
Canada		Coefficient of discharge K	
Canada: CRN	Approval No.	For current approval no. see www.leser.com	
	S/G	Rated slope acc. to ASME VIII. Div. 1 UG-131 (d) (2)	0.801
		G: 1.99 SCFM/psia	
		S: 5.59 lb/hr/psia	
	L	Rated slope acc. to ASME VIII. Div. 1 UG-131 (d) (2)	0.579
		3.11 GPM/ $\sqrt{\text{psid}}$	
China		Coefficient of discharge α_w	
AQSIQ	Approval No.	For current approval no. see www.leser.com	
	S/G	0.45	0.80
	L	0.32	0.58
Eurasian Custom Union		Coefficient of discharge α_w	
EAC	Approval No.	For current approval no. see www.leser.com	
	S/G	0.45	0.80
	L	0.32	0.58
Classification societies		Homepage	
Bureau Veritas	BV	www.bureauveritas.com	The valid certification number is changed with every renewal.
Det Norske Veritas	DNV	www.dnv.com	
Germanischer Lloyd	GL	www.gl-group.com	
Lloyd's register EMEA	LREMEA	www.lr.org	For a sample certificate including the valid certification number see www.leser.com
U.S. Coast Guard	U.S.C.G	www.uscg.org	
ClassNK NIPPON Kaiji Kyokai (Japan)		www.classnk.or.jp	